TEXOMA FIVE DEPARTURE

LONE STAR DEP CON
118.1 306.95
ATIS
126.925
CLNC DEL
128.725
GND CON
132.65 306.2
ALLIANCE TOWER
135.15 257.9

TOP ALTITUDE: ASSIGNED BY ATC

RADAR and DME required.

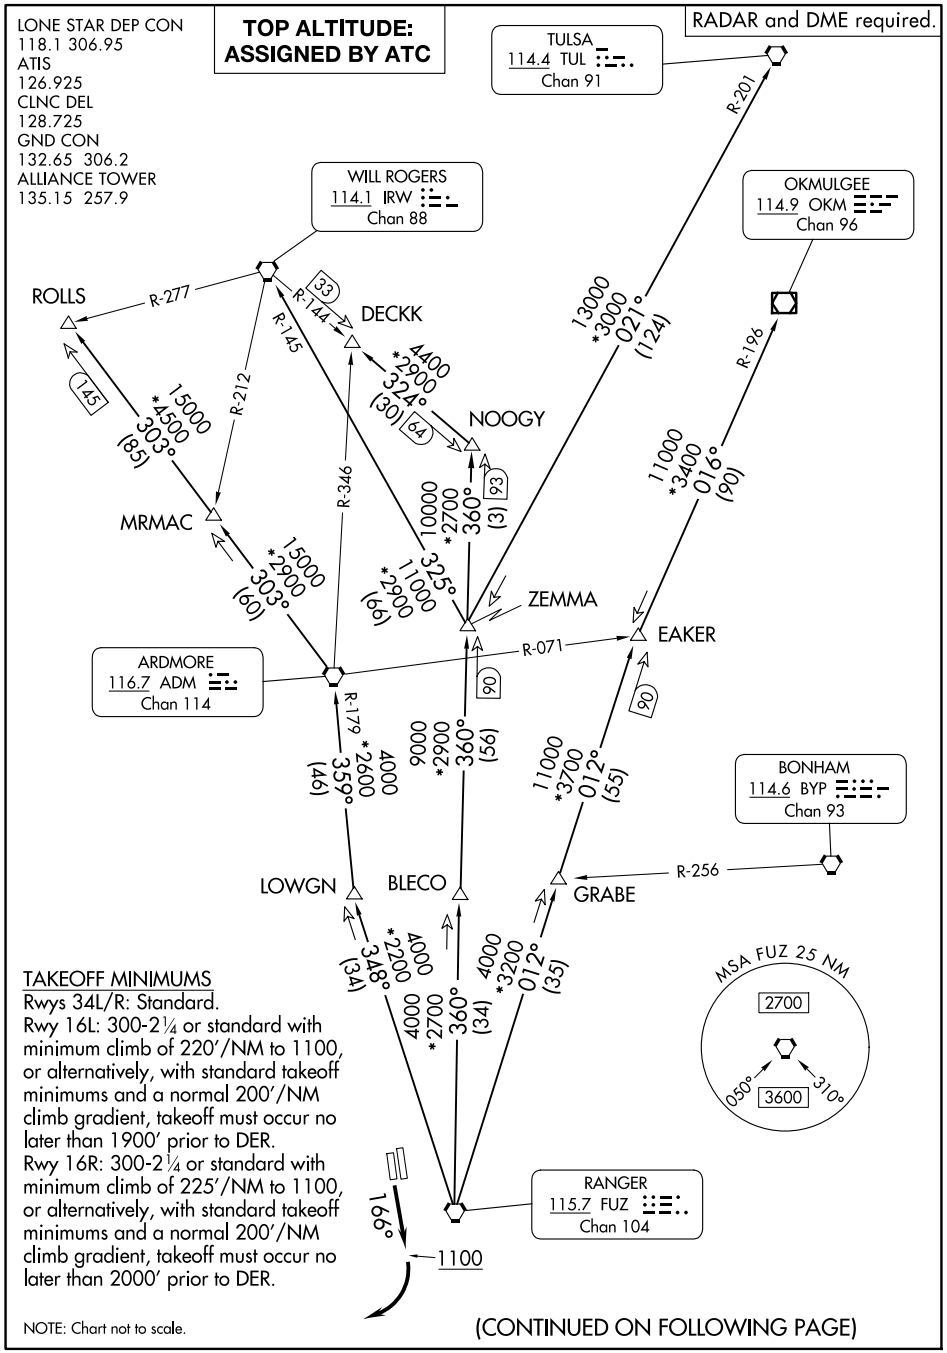

TAKEOFF MINIMUMS
Rwys 34L/R: Standard.
Rwy 16L: 300-2¼ or standard with minimum climb of 220′/NM to 1100, or alternatively, with standard takeoff minimums and a normal 200′/NM climb gradient, takeoff must occur no later than 1900′ prior to DER.
Rwy 16R: 300-2¼ or standard with minimum climb of 225′/NM to 1100, or alternatively, with standard takeoff minimums and a normal 200′/NM climb gradient, takeoff must occur no later than 2000′ prior to DER.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)