WAAS	APP CRS	Rwy Idg	6236
CH 69629	317°	TDZE	2605
W32A		Apt Elev	2613

RNAV (GPS) RWY 32

PECOS MUNI (PEQ)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using Wink altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Wink altimeter setting: increase LPV DA to 2900 feet, LNAV/VNAV DA to 2950 feet and all visibilities ¼ SM; increase all MDA 100 feet and visibility Cat C and LNAV Cat D ¼ SM. Circling Rwy 9, 27 NA at night.

MISSED APPROACH: Climb to 4600 direct WALOM and hold.

AWOS-3	ALBUQUERQUE CENTER	UNICOM
118.175	135.875 292.15	122.8 (CTAF) L

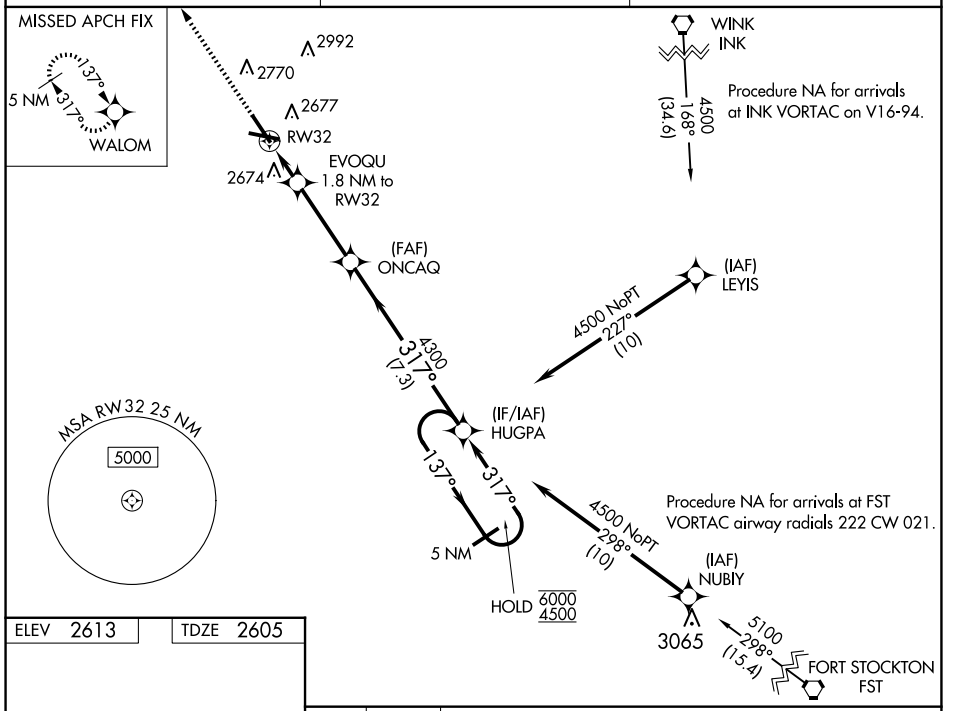

ELEV 2613	TDZE 2605

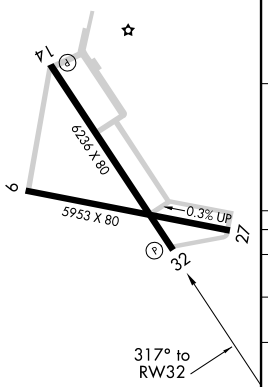

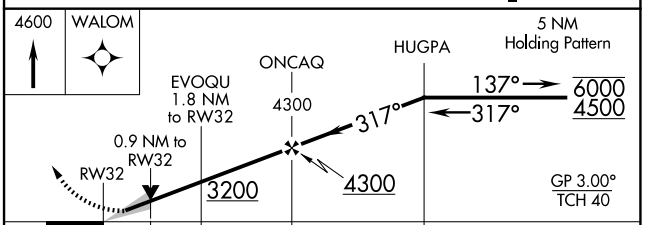

CATEGORY	A	B	C	D
LPV DA	2805-¾		200 (200-¾)	
LNAV/VNAV DA	2855-¾		250 (300-¾)	
LNAV MDA	2940-1		335 (400-1)	
C CIRCLING	3060-1 447 (500-1)	3140-1 527 (600-1)	3360-2¼ 747 (800-2¼)	3360-2½ 747 (800-2½)

MIRL Rwys 9-27 and 14-32 L

SC-3, 07 AUG 2025 to 04 SEP 2025
SC-3, 07 AUG 2025 to 04 SEP 2025