
2025

04 SEP

07 AUG 2025

SE-3, (

LIFRR TWO DEPARTURE (RNAV)

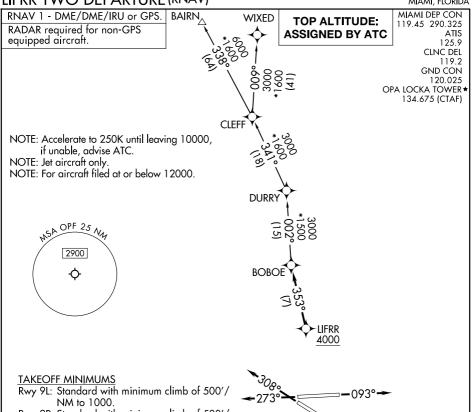

Rwy 9R: Standard with minimum climb of 500'/ NM to 700.

Rwys 12, 27R: Standard with minimum climb of 500'/NM to 600.

Rwys 27L, 30: Standard.

NOTE: Chart not to scale.

V

07 AUG 2025

ō 04 SEP

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 9L/R: Climb on heading 093° or as assigned by ATC, thence. . . TAKEOFF RUNWAY 12: Climb on heading 128° or as assigned by ATC, thence. . . TAKEOFF RUNWAYS 27L/R: Climb on heading 273° or as assigned by ATC, thence. . . TAKEOFF RUNWAY 30: Climb on heading 308° or as assigned by ATC, thence. . .

. . . for RADAR vector to cross LIFRR at or above 4000, then on track 353° to BOBOE, then on assigned transition, maintain ATC assigned altitude, expect clearance to filed altitude within 10 minutes after departure.

BAIRN TRANSITION (LIFRR2.BAIRN) WIXED TRANSITION (LIFRR2.WIXED)