
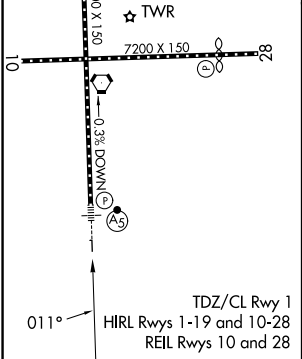



GPS required. For uncompensated Baro-VNAV systems, procedure NA below -15°C (3°F) or above 47°C (117°F). For inoperative MALSR, increase RNP 0.15 visibility to 1½ and RNP 0.30 visibility to 1½.

MALSR

MISSED APPROACH: Climb to 3000 on track 011° to OXFIC and on track 357° to OTOLE and hold.

D-ATIS 120.45	ALBANY APP CON 132.825 307.2	ALBANY TOWER 119.5 257.8	GND CON 121.7 348.6	CLNC DEL 127.50
------------------	---------------------------------	-----------------------------	------------------------	--------------------

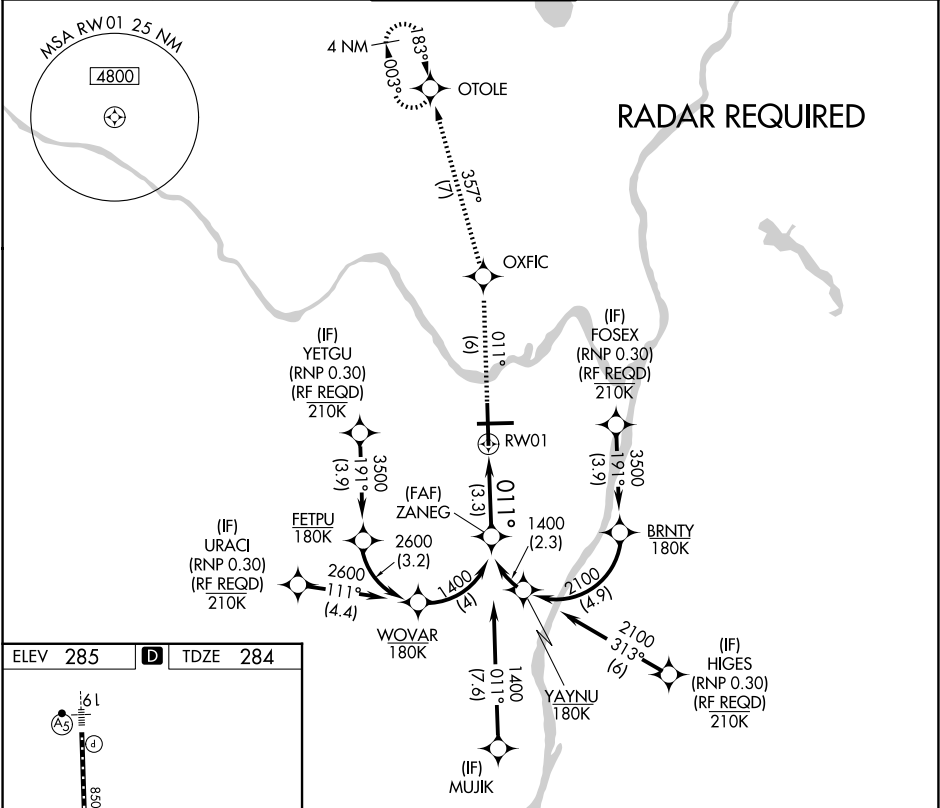

3000 ↑	tr 011°	OXFIC ✦	tr 357°	OTOLE ✦	ZANEG 1400
See planview for multiple IF locations.					
GP 3.00° TCH 56					
CATEGORY	A	B	C	D	
RNP 0.15 DA	656/40		372 (400-¾)		
RNP 0.30 DA	727/50		443 (500-1)		
AUTHORIZATION REQUIRED					