

|                                        |                        |                                                     |             |
|----------------------------------------|------------------------|-----------------------------------------------------|-------------|
| WAAS<br>CH <b>61007</b><br><b>W31A</b> | APP CRS<br><b>315°</b> | Rwy Ldg<br>TDZE <b>1423</b><br>Apt Elev <b>1425</b> | <b>5099</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|-------------|

RNAV (GPS) RWY 31


ALEXANDRIA RGNL/CHANDLER FLD (A.XN)

Inoperative table does not apply to LPV & LNAV/VNAV Cats A/B/C and LNAV Cat C. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP -0.3 NA. VDP and Baro-VNAV NA when using Glenwood altimeter setting. When local altimeter setting not received, use Glenwood altimeter setting and increase all DAs/MDAs 40 feet and increase LPV and LNAV/VNAV visibilities ¼ mile all Cats.


ODALS

MISSED APPROACH: Climb to 3500 direct OCIWE and via 352° track to TILER and hold.

|                        |                                          |                                 |
|------------------------|------------------------------------------|---------------------------------|
| ASOS<br><b>118.375</b> | MINNEAPOLIS CENTER<br><b>126.1 269.2</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|------------------------|------------------------------------------|---------------------------------|

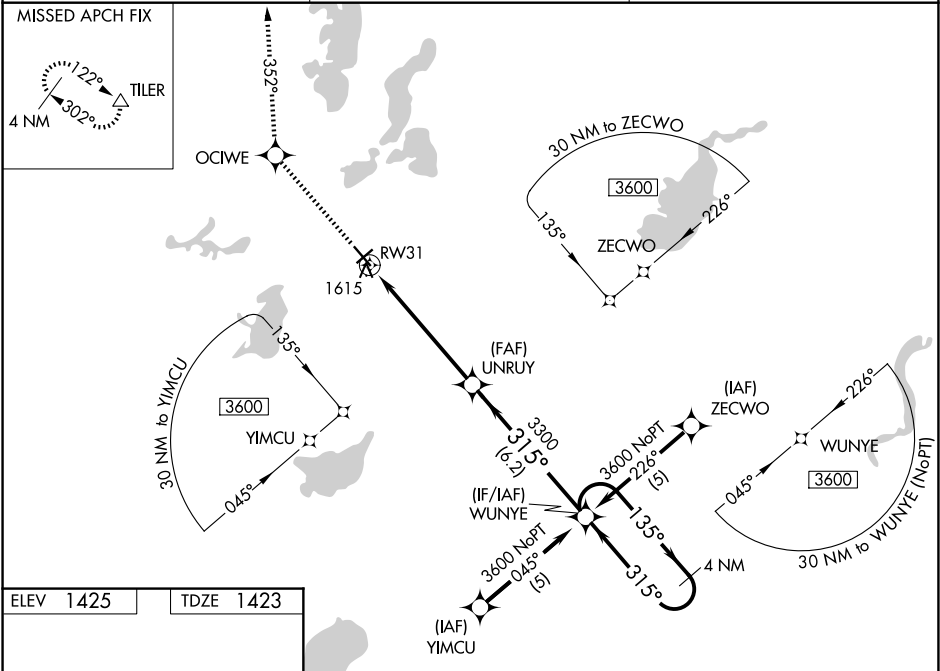

|           |           |
|-----------|-----------|
| ELEV 1425 | TDZE 1423 |
|-----------|-----------|

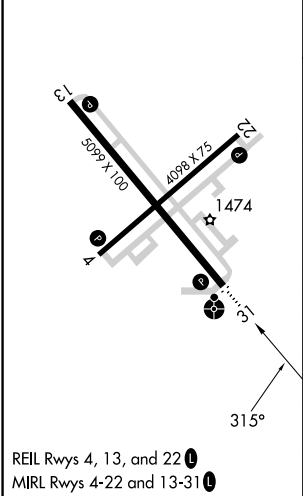

|                      |         |             |                         |                         |                      |
|----------------------|---------|-------------|-------------------------|-------------------------|----------------------|
| 3500                 | OCIWE   | tr 352°     | TILER                   | WUNYE                   | 4 NM Holding Pattern |
| *LNAV only.          |         |             |                         |                         |                      |
| *1.3 NM to RW31      |         |             |                         |                         |                      |
| UNRUY                |         |             |                         |                         |                      |
| RW31                 |         |             |                         |                         |                      |
| 1.3 NM 4.4 NM 6.2 NM |         |             |                         |                         |                      |
| CATEGORY             | A       | B           | C                       | D                       |                      |
| LPV DA               | 1815-1¼ |             | 392 (400-1¼)            |                         |                      |
| LNAV/VNAV DA         | 1885-1½ |             | 462 (500-1½)            |                         |                      |
| LNAV MDA             | 1880-¾  | 457 (500-¾) | 1880-1¼<br>457 (500-1¼) | 1880-1½<br>457 (500-1½) |                      |
| CIRCLING             | 1920-1  | 495 (500-1) | 1940-1½<br>515 (600-1½) | 2000-2<br>575 (600-2)   |                      |