

LOC I-AIW	APP CRS	Rwy Ldg	9002
108.9	309°	TDZE	733
		Apt Elev	777


ILS or LOC RWY 31

ARDMORE MUNI (ADM)


Autopilot coupled approach NA below 1360. Inop table does not apply to S-ILS 31 all Cats, S-LOC 31 Cats A and B, and UMEHU fix minimums S-LOC 31 Cats A and B. For inop ALS, increase UMEHU fix minimums S-LOC 31 Cats C and D visibility to 1 SM.

MALSR
MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct ADM VORTAC and hold.

ATIS	FORT WORTH CENTER	ARDMORE TOWER ★	GND CON	UNICOM
125.6	124.75 323.0	118.5 (CTAF) 257.7	121.8	122.95

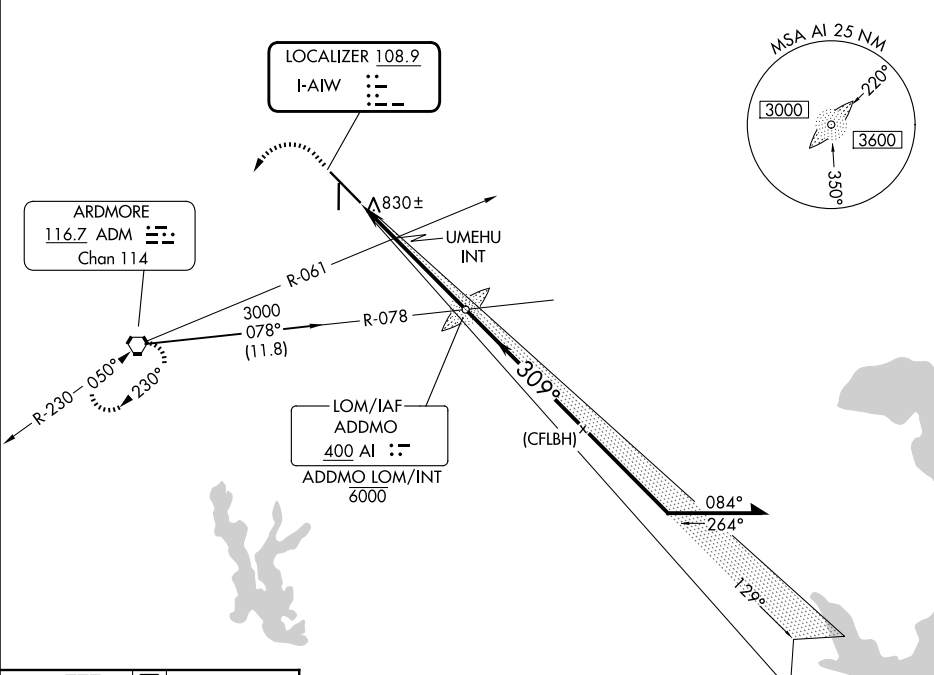

ELEV 777	TDZE 733
----------	----------



HIRL Rwy 13-31	MIRL Rwy 17-35
FAF to MAP 5.4 NM	
Knots	60 90 120 150 180
Min:Sec	5:24 3:36 2:42 2:10 1:48

2000

3000

ADM

↑

↷

⬡

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 49).

UMEHU INT

1280 *

1.8 NM

3.6 NM

AI LOM

ADDMO INT

6000

2520

129°

309°

3000

2600

GS 3.00°

TCH 53

Remain within 10 NM

CATEGORY	A	B	C	D
S-ILS 31	936-½		203 (200-½)	
S-LOC 31 *	1280-½	547 (600-½)	1280-1⅛	547 (600-1⅛)
CIRCLING	1300-1 523 (600-1)	1440-1 663 (700-1)	1500-2 723 (800-2)	1700-3 923 (1000-3)
UMEHU FIX MINIMUMS (DUAL RECEIVERS REQUIRED)				
S-LOC 31	1080-½	347 (400-½)	1080-⅝	347 (400-⅝)
CIRCLING	1300-1 523 (600-1)	1440-1 663 (700-1)	1500-2 723 (800-2)	1700-3 923 (1000-3)