

WAAS CH 58118 W30A	APP CRS 301°	Rwy Ldg TDZE 493 Apt Elev 510
--	------------------------	---

RNAV (GPS) RWY 30R
MEADOWS FLD (BFL)


RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). Circling NA northeast of Rwy 12L-30R. When local altimeter setting not received, use Porterville altimeter setting: increase LPV DA to 790, LNAV/VNAV DA to 990. Increase LNAV/VNAV all Cats visibilities to 1 ¼ mile; increase all MDA 100 feet and LNAV visibility Cats C and D to RVR 5000. VDP and Baro-VNAV NA when using Porterville altimeter setting. For inop ALS when using Porterville altimeter setting, increase LPV all Cats visibility to RVR 5000 and LNAV Cat C and D visibility to 1%. # RVR 2400 when using Porterville altimeter setting.

MALS R

MISSED APPROACH:
Climb to 1000 then climbing right turn to 3000 direct STEBN and hold.

ATIS 118.6	BAKERSFIELD APP CON * 118.9 270.3 (N) 118.8 284.625 (S)	BAKERSFIELD TOWER * 118.1 (CTAF) 257.8	GND CON 121.7	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

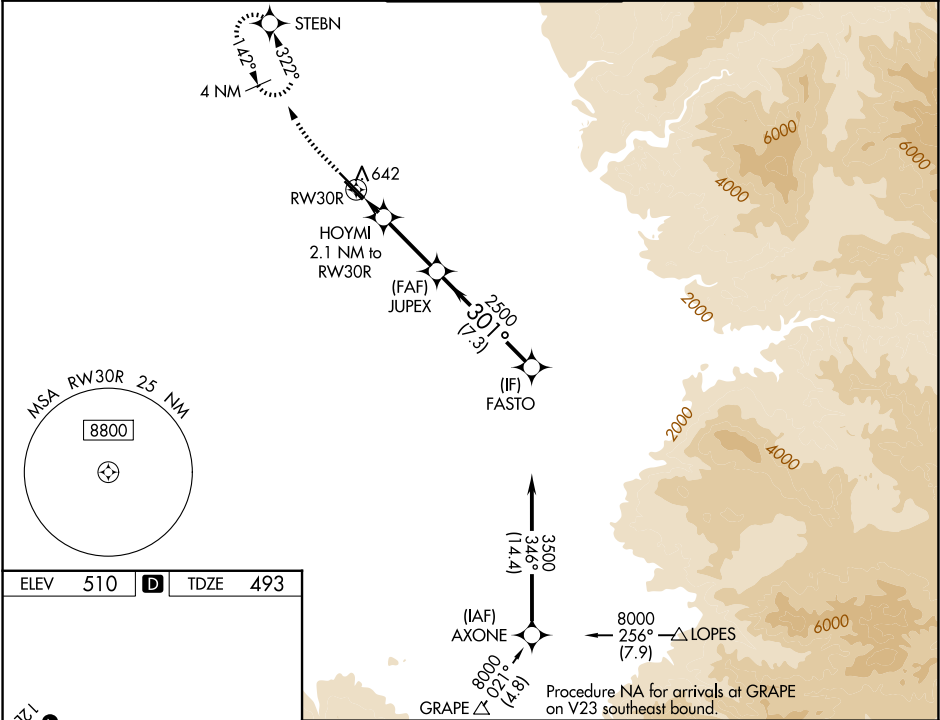

ELEV **510** **D** TDZE **493**

TDZ/CL Rwy 30R
HIRL Rwy 12L-30R **I**
MIRL Rwy 12R-30L **I**
REIL Rwy 12R and 30L

1000 3000 STEBN		FASTO	
*LNAV only		JUPEX 2500	
*1.1 NM to RWY 30R		HOYMI 2.1 NM to RWY 30R	
RWY 30R		1200*	
1.1 NM		4.1 NM	
1 NM		7.3 NM	
CATEGORY	A	B	C
LPV DA#	698/18 205 (200-½)		
LNAV/VNAV DA	898/45 405 (400-¾)		
LNAV MDA	880/24	387 (400-½)	880/35 387 (400-¾)
CIRCLING	960-1	450 (500-1)	960-1½ 450 (500-1½) 1060-2 550 (600-2)

SW-3, 04 SEP 2025 to 02 OCT 2025

SW-3, 04 SEP 2025 to 02 OCT 2025