


WAAS CH 56411 W23A	APP CRS 227°	Rwy Ldg 10004 TDZE 929 Apt Elev 952
--	------------------------	--

RNAV (GPS) RWY 23R

BATTLE CREEK EXEC AT KELLOGG FLD (BTL)

RNP APCH - GPS.				MALSR 	MISSED APPROACH: Climb to 2500 direct WEVSO and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Circling to Rwy 5R, 23L and 31 NA at night. When local altimeter setting not received, use Grand Rapids altimeter setting: increase all LPV DA to 1236 feet and LNAV/VNAV DA to 1365 feet and visibility to RVR 5000 all Cats; increase all MDA 120 feet, LNAV Cats C and D visibility to 1¼ SM and Circling Cat C visibility to 2 SM and Cat D visibility to 2½ SM. For inop ALS when using Grand Rapids altimeter setting, increase LPV all Cats visibility to RVR 5000 and LNAV Cats C and D to visibility 1½ SM. Baro-VNAV and VDP NA when using Grand Rapids altimeter setting. *RVR 1800 authorized with use of FD or AP or HUD to DA.					
ATIS 128.325	GREAT LAKES APP CON★ 119.2 239.25	BATTLE CREEK TOWER★ 126.825 0 (CTAF)	GND CON 121.7		UNICOM 122.95

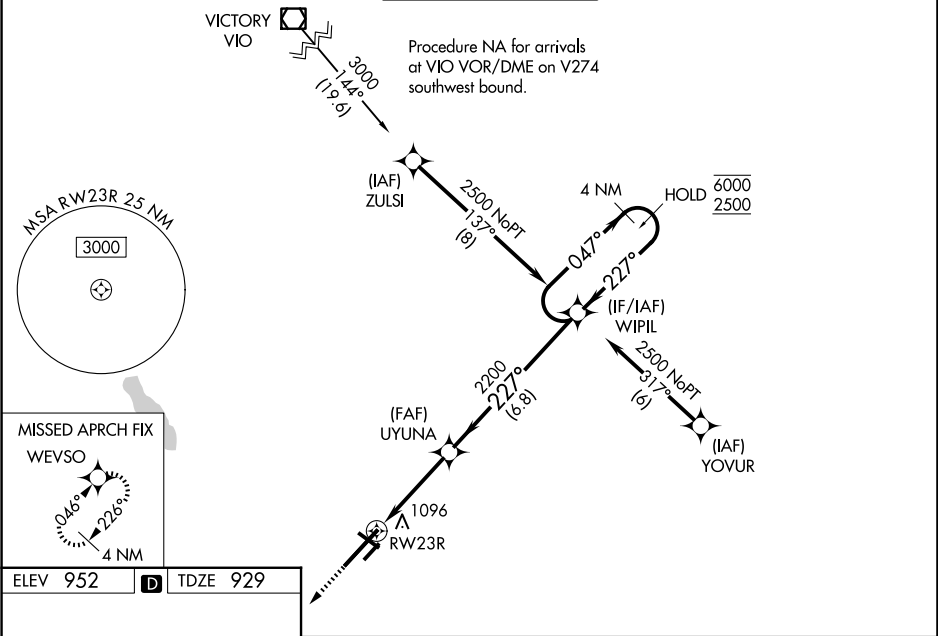

ELEV 952 D TDZE 929		2500 WEVSO 4 NM Holding Pattern			
227° 1.3 4835 X 100 23L 1001 X 100 23R 1004 X 150 31 4100 X 75 TWR		1.3 NM to RWY 23R UYUNA 2200 WIPIL 227° 6.8 NM			
0.4% DOWN		GP 3.00° TCH 49			
CATEGORY		A	B	C	D
LPV DA *		1129/24		200 (200-½)	
LNAV/VNAV DA		1258/32		329 (400-⅝)	
LNAV MDA		1380/24	451 (500-½)	1380/45	451 (500-⅞)
CIRCLING		1420-1 468 (500-1)	1480-1 528 (600-1)	1520-1½ 568 (600-1½)	1520-2 568 (600-2)

EC-1, 04 SEP 2025 to 02 OCT 2025

EC-1, 04 SEP 2025 to 02 OCT 2025