

APP CRS
319°

Rwy Ldg
7822

TDZE
439

Apt Elev
459

RNAV (GPS) RWY 32L

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)


RNP APCH-GPS.

For inop ALS, increase LNAV Cat C/D visibility to 1 3⁄8 mile.

ALSF-1

MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct QODCU and hold.

ATIS ★ 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8	CLNC DEL 119.875 263.025
-----------------------	---------------------------------	-----------------------------	------------------------	-----------------------------

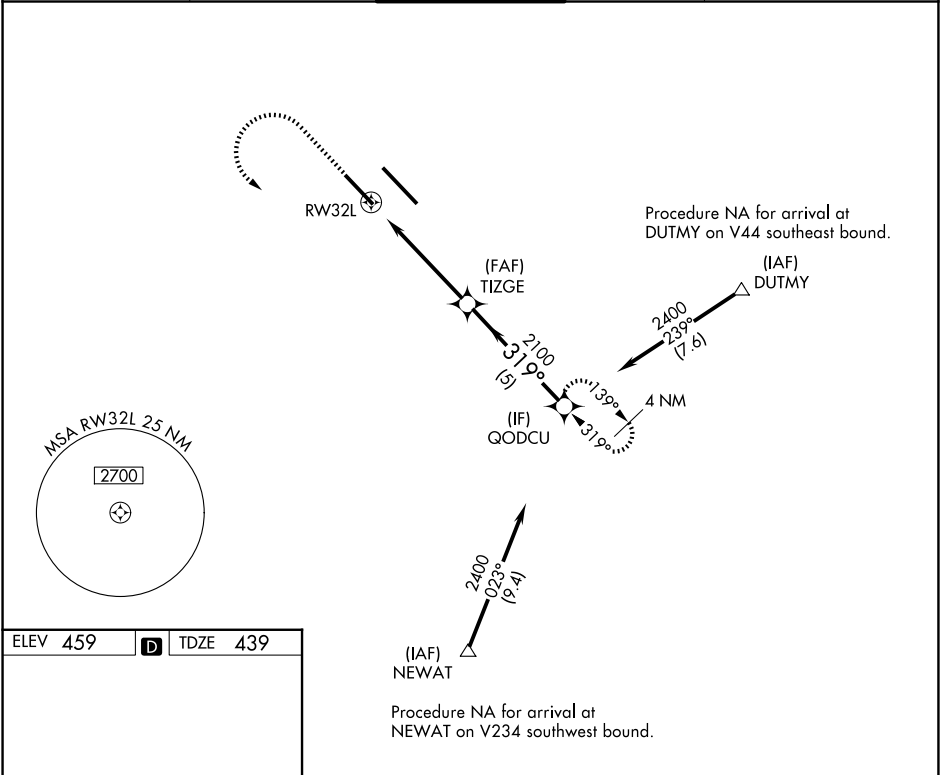

ELEV 459

D

TDZE 439

1500

2400

QODCU

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).

QODCU

TIZGE

2100

2400

319°

1.4 NM to RW32L

3.03° TCH 55

1.4 NM

3.7 NM

5 NM

CATEGORY	A	B	C	D
LNAV MDA	920/24	481 (500-1⁄2)	920/50	481 (500-1)
CIRCLING	1000-1 541 (600-1)	1120-1 661 (700-1)	1240-2 1⁄4 781 (800-2 1⁄4)	1240-2 1⁄2 781 (800-2 1⁄2)