

WAAS CH 58306 W18A	APP CRS 181°	Rwy ldg 11602 TDZE 250 Apt Elev 254
--	------------------------	--



RNAV (GPS) RWY 18

ARKANSAS INTL (BYH)

Inop table does not apply. Baro-VNAV NA when using Blytheville Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Circling NA east of Rwy 18-36. DME/DME RNP-0.3 NA. Obtain local altimeter setting on CTAF; when not received, use Blytheville Muni altimeter setting and increase all DA 14 feet and all MDA 20 feet. Increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ½ mile.

MISSED APPROACH: Climb to 2500 direct HABSI and hold.

MEMPHIS CENTER 134.65 316.15	UNICOM 122.7 (CTAF) 0
--	---------------------------------

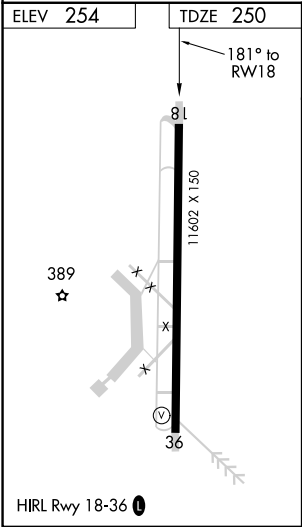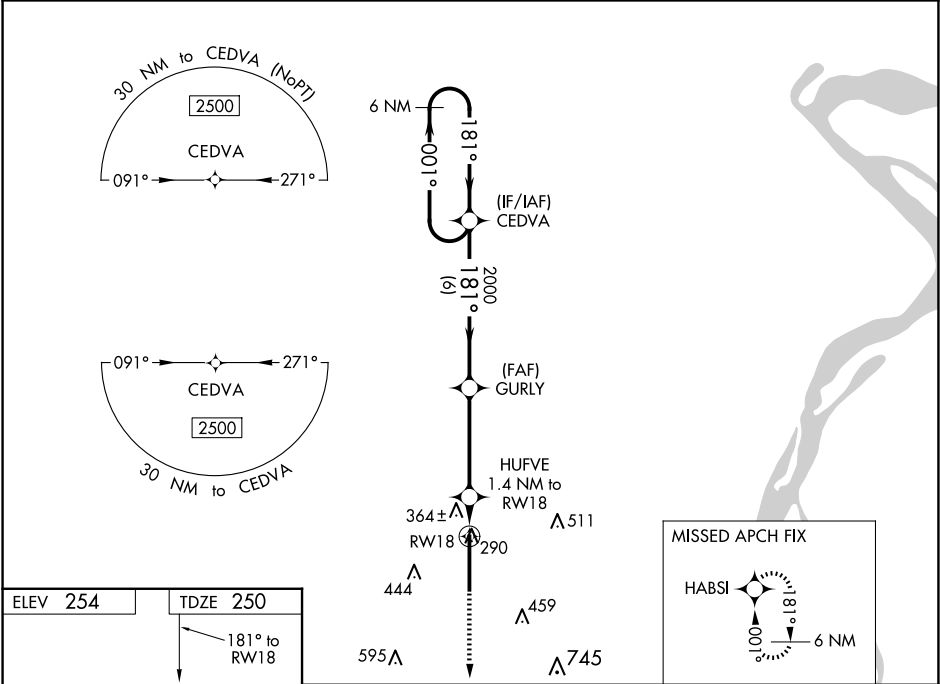

2500	HABSI	GURLY	HUFVE	RWY 18	CEDVA	6 NM Holding Pattern
*LNAV only.			1.4 NM to RWY 18	1.4 NM	3.9 NM	6 NM
			740*	2000	181°	001°
						2500
						GP 3.00° TCH 54
CATEGORY	A	B	C	D		
LPV DA		450-3/4	200 (200-3/4)			
LNAV/VNAV DA		545-1	295 (300-1)			
LNAV MDA		620-1	370 (400-1)			
CIRCLING	700-1 446 (500-1)	720-1 466 (500-1)	800-1½ 546 (600-1½)	820-2 566 (600-2)		

SC-1, 04 SEP 2025 to 02 OCT 2025

SC-1, 04 SEP 2025 to 02 OCT 2025