


APP CRS	Rwy Ldg	5801
079°	TDZE	727
	Apt Elev	778

RNAV (RNP) Y RWY 8

BOB HOPE (BUR)

RNP AR APCH.	MALSR	MISSED APPROACH: Climb to 1200 then climbing right turn to 4600 direct COTSI and on track 263° to YOLYY and hold. *Missed approach requires minimum climb of 340 feet per NM to 2400. # Missed approach requires minimum climb of 317 feet per NM to 2400.
⚠ For uncompensated Baro-VNAV systems, procedure NA below 1°C or above 54°C. Straight-in Rwy 8 at night, operational VGSi required, remain on or above VGSi glidepath until threshold. Inop table does not apply to RNP 0.20* and RNP 0.30. For inop ALS, increase RNP 0.30* all Cats visibility to 1½ SM.	AS	

D-ATIS	SOCAL APP CON	BURBANK TOWER	GND CON	CLNC DEL	CPDLC
134.5	120.4 360.6 (NORTH) 134.2 338.2 (WEST)	118.7 254.3	123.9 348.6	118.0 348.6	

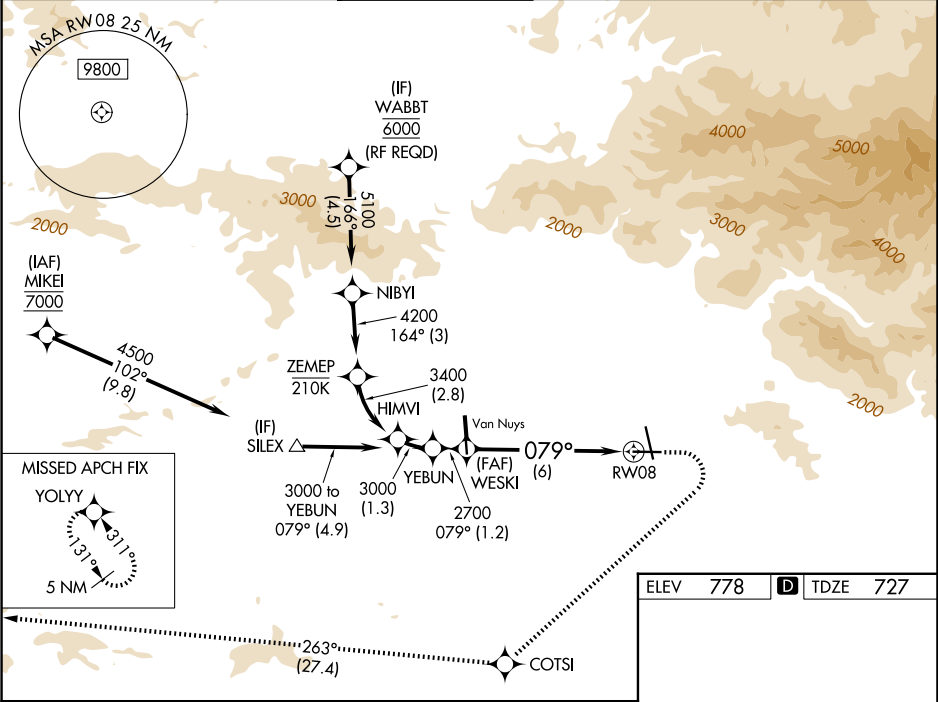

YEBUN 3000 GP 3.00° TCH 60		WESKI 2700		 1200  4600  COTSIF Ir 263°  <td colspan="2"> See planview for multiple IF locations. </td>		See planview for multiple IF locations.	
079° 2700		6 NM RW08		079° 5802 X 150 6886 X 150 1.26 UP 0.5% UP TWR 33			
CATEGORY	A	B	C	D			
RNP 0.20 DA*	1068/50		341 (300-1)				
RNP 0.30 DA#	1151/50		424 (400-1)				
RNP 0.30 DA	1485-2½		758 (800-2½)				
AUTHORIZATION REQUIRED							
MIRL Rwy 15-33 HIRL Rwy 8-26 REIL Rws 15, 26 and 33							