

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>90100</b><br><b>W36D</b> | APP CRS<br><b>003°</b> | Rwy Idg <b>8390</b><br>TDZE <b>727</b><br>Apt Elev <b>748</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) Y RWY 36R  
CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH.

**T** Circling NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALSF, increase LNAV/VNAV all Cats visibility to 1½ mile.

ALSF-2

**MISSED APPROACH:**  
Climb to 1320 then  
climbing right turn to  
4000 direct LOCAS  
and hold.

D-ATIS  
ARR **121.15**  
DEP **132.1**

| CHARLOTTE APP CON |               |
|-------------------|---------------|
| (001°-119°)       | <b>128.32</b> |
| (120°-295°)       | <b>120.05</b> |
| (296°-360°)       | <b>134.75</b> |
| (180°-359°)       | <b>257.2</b>  |
| (360°-179°)       | <b>307.8</b>  |

## CHARLOTTE TOWER


|                |               |              |
|----------------|---------------|--------------|
| (Rwys 18L-36R) | <b>118.1</b>  | <b>257.8</b> |
| (Rwy 18C-36C)  | <b>126.4</b>  | <b>257.8</b> |
| (Rwy 18R-36L)  | <b>133.35</b> | <b>257.8</b> |

GND CON

121.8 348.6 (WEST)  
121.9 348.6 (EAST)


CLNC DEL

127.15  
348.6

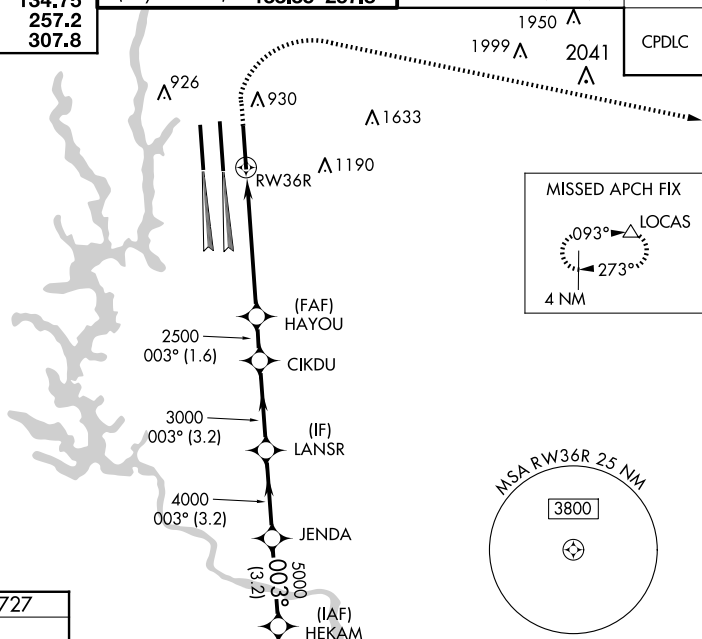

|          |          |          |
|----------|----------|----------|
| ELEV 748 | <b>D</b> | TDZE 727 |
|----------|----------|----------|

HIRL all Rwy's  
REIL Rwy's 18L and 23  
TDZ/CL Rwy's 18R, 36L, 36C and 36R

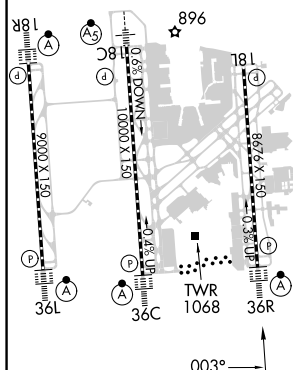

| <div> <div>1320<br/>↑</div> <div>4000<br/>↗</div> <div>LOCAS<br/>△</div> </div> <div>           VGS1 and RNAV glidepath not coincident<br/>(VGS1 Angle 3.00/TCH 74).         </div> |  | <div>           JENDA<br/>HEKAM<br/>LANSR<br/>CIKDU<br/>HAYOU<br/>RW36R         </div>                                                                                  |             |                         |                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------------------|-------------------------|
| *RNAV only.                                                                                                                                                                         |  | <div>           6000<br/>5000<br/>4000<br/>3000<br/>2500<br/>2500<br/>1.6<br/>3.8 NM<br/>1.6 NM<br/>3.2 NM<br/>3.2 NM<br/>3.2 NM<br/>GP 3.00°<br/>TCH 55         </div> |             |                         |                         |
| CATEGORY                                                                                                                                                                            |  | A                                                                                                                                                                       | B           | C                       | D                       |
| LPV DA                                                                                                                                                                              |  | 927/18                                                                                                                                                                  |             | 200 (200-½)             |                         |
| RNAV/<br>VNAV DA                                                                                                                                                                    |  | 1229-1¼                                                                                                                                                                 |             | 502 (500-1¼)            |                         |
| RNAV MDA                                                                                                                                                                            |  | 1320/24                                                                                                                                                                 | 593 (600-½) | 1320-1¼                 | 593 (600-1¼)            |
| <b>C</b> CIRCLING                                                                                                                                                                   |  | 1380-1                                                                                                                                                                  | 632 (700-1) | 1500-2¼<br>752 (800-2¼) | 1500-2½<br>752 (800-2½) |

CHARLOTTE/DOUGLAS INTL (CLT)  
RNAV (GPS) Y RWY 36R