

WAAS
CH **65614**
W04A

APP CRS
047°

Rwy Ldg
TDZE **619**
Apt Elev **620**

RNAV (GPS) Z RWY 4R

CHICAGO MIDWAY INTL (MDW)

RNP APCH - GPS


▼

⚠

Rwy 4R helicopter visibility reduction below RVR 4000 NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.

D-ATIS 132.75	CHICAGO APP CON 128.2 353.875	MIDWAY TOWER 135.2 269.125	GND CON 118.075	CLNC DEL 124.625	CPDLC
-------------------------	---	--------------------------------------	---------------------------	----------------------------	-------

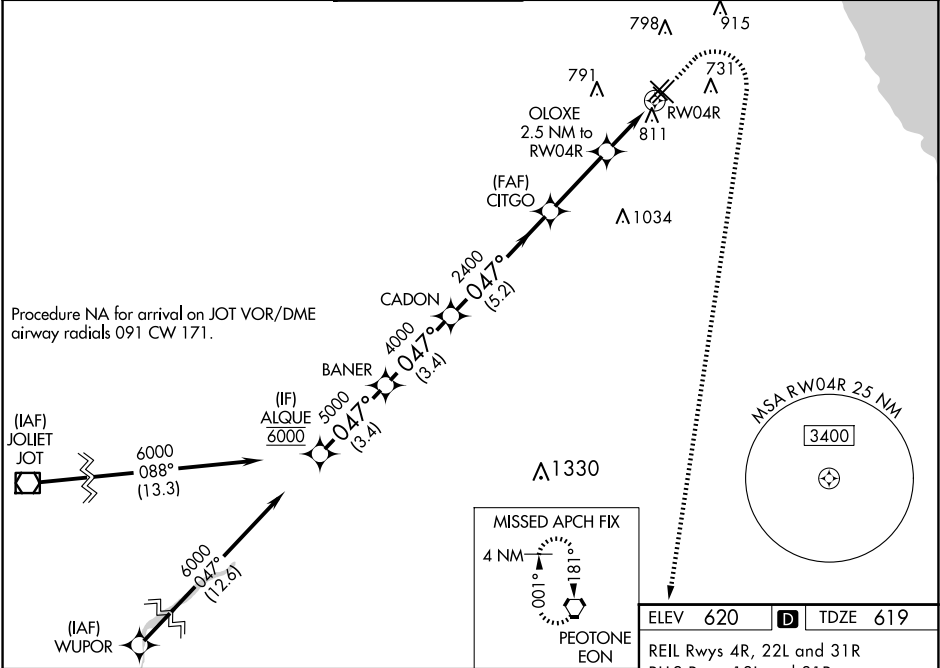

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).					
ALQUE	BANER	CADON	CITGO	OLOXE	RWY 4R
6000	5000	4000	2400	2400	620
GP 3.00°	047°	047°	047°	047°	047°
TCH 50					
3.4 NM	3.4 NM	5.2 NM	2.9 NM	1.3 NM	1.2 NM
CATEGORY	A	B	C	D	
LPV DA	869/40		250 (300-¾)		
LNAV/VNAV DA	1097-1⅓		478 (500-1⅓)		
LNAV MDA	1080/55	461 (500-1)	1080-1⅓	461 (500-1⅓)	
CIRCLING	1120-1	500 (500-1)	1340-2	1340-2¼	
			720 (800-2)	720 (800-2¼)	