

CLEVELAND, OHIO



AL-84 (FAA)

24305

WAAS CH 40109 W28A	APP CRS 281°	Rwy Idg 6018 TDZE 799 Apt Elev 799
--	------------------------	---

RNAV (GPS) RWY 28
CLEVELAND-HOPKINS INTL (CLE)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Circling Rwy 10 NA at night. Inop table does not apply to LPV.		MALSF A4	MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 direct DJB VOR/DME and hold.		
D-ATIS ARR 127.85 DEP 132.375	CLEVELAND APP CON 126.55 346.325	CLEVELAND TOWER 124.5 273.45	GND CON 121.7 273.45	CLNC DEL 125.05 273.45	CPDLC

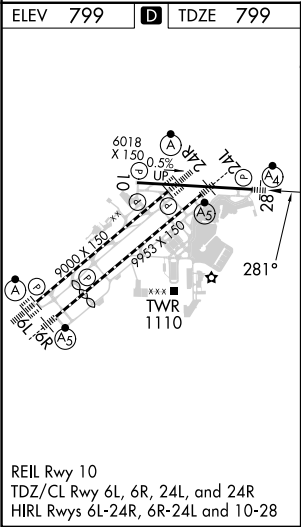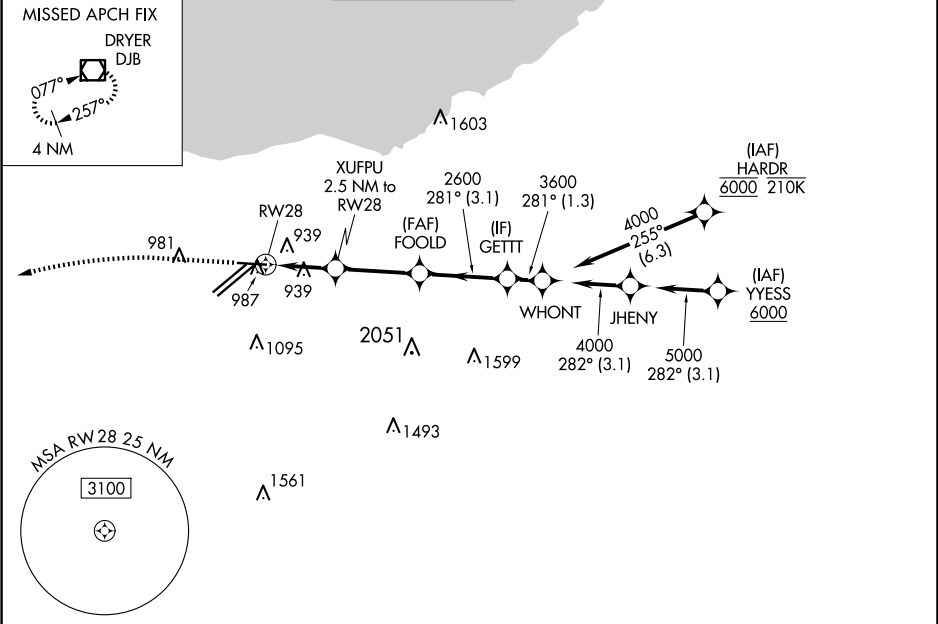

1400	3000	DJB
*LNAV only.		
XUFPU 2.5 NM to RW28		
RW28 *1.3 NM to RW28		
FOOLD 2600		
GETTT 3600		
GP 3.00° TCH 46		
1.3 NM 1.2 NM 3 NM 3.1 NM		
CATEGORY	A	B C D
LPV DA	999/40	200 (200-¾)
LNAV/VNAV DA	1168/40	369 (400-¾)
LNAV MDA	1260/40 461 (500-¾)	1260/60 461 (500-1¼)
CIRCLING	1420-1 621 (700-1)	1420-1¾ 621 (700-1¾) 1420-2 621 (700-2)

CLEVELAND, OHIO
Amdt 3 24MAY18

41°25'N-81°51'W

CLEVELAND-HOPKINS INTL (CLE)
RNAV (GPS) RWY 28

EC-2, 04 SEP 2025 to 02 OCT 2025

EC-2, 04 SEP 2025 to 02 OCT 2025