

|                         |                        |                                                     |
|-------------------------|------------------------|-----------------------------------------------------|
| WAAS<br>CH <b>49112</b> | APP CRS<br><b>352°</b> | Rwy Ldg<br>TDZE <b>6075</b><br>Apt Elev <b>6187</b> |
|-------------------------|------------------------|-----------------------------------------------------|

RNAV (GPS) Y RWY 35L

CITY OF COLORADO SPRINGS MUNI (COS)

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP- 0.3 NA. For inop MALSR increase LNAV Cat C and D visibility to RVR 5500. RADAR monitoring required when R-2601 in use. # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR


MISSED APPROACH:  
Climb to 6700 then climbing right turn to 9000 direct ADANE and hold.

|                            |                                         |                                     |                               |                                   |
|----------------------------|-----------------------------------------|-------------------------------------|-------------------------------|-----------------------------------|
| ATIS<br><b>125.0 254.3</b> | SPRINGS APP CON<br><b>124.0 257.875</b> | SPRINGS TOWER<br><b>119.9 360.6</b> | GND CON<br><b>121.7 348.6</b> | CLNC DEL<br><b>134.45 363.125</b> |
|----------------------------|-----------------------------------------|-------------------------------------|-------------------------------|-----------------------------------|

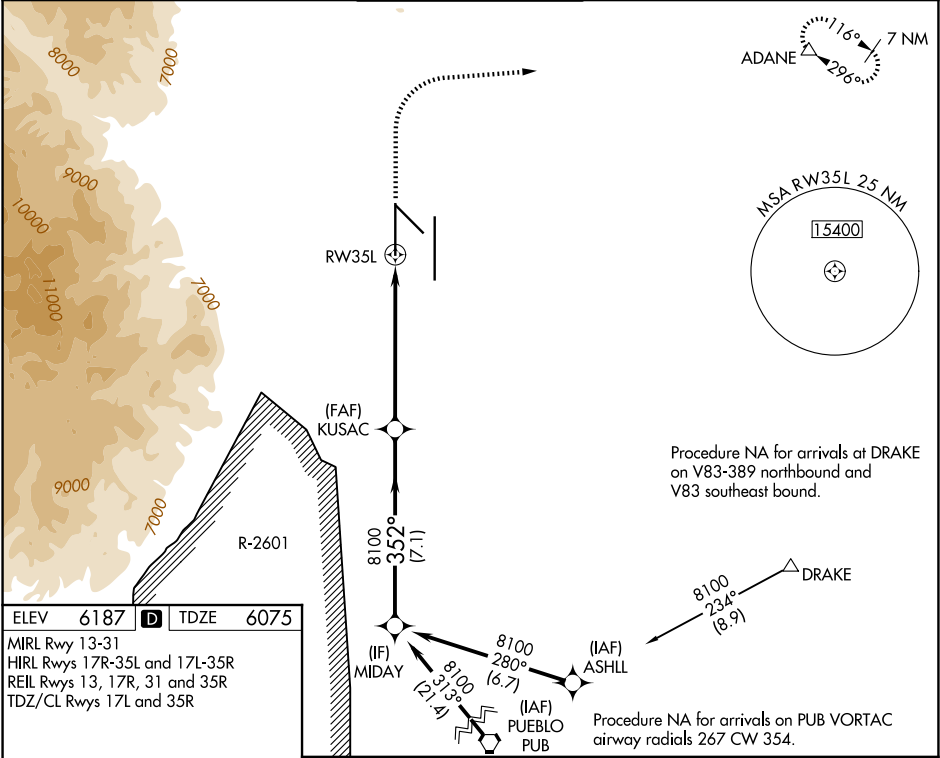

ELEV 6187 **D** TDZE 6075

MIRL Rwy 13-31  
HIRL Rwy 17R-35L and 17L-35R  
REIL Rwy 13, 17R, 31 and 35R  
TDZ/CL Rwy 17L and 35R

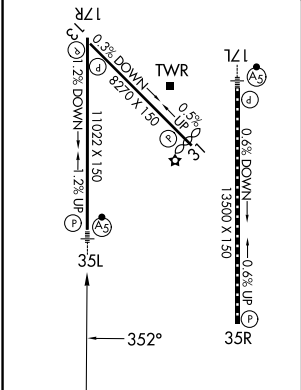

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).

GP 3.00° TCH 55

7.1 NM 5.3 NM 1 NM

| CATEGORY      | A                     | B                     | C                       | D                       |
|---------------|-----------------------|-----------------------|-------------------------|-------------------------|
| LPV DA #      |                       | 6275/24               | 200 (100-½)             |                         |
| LNAV/ VNAV DA |                       | 6380/30               | 305 (200-⅝)             |                         |
| LNAV MDA      | 6440/24               | 365 (300-½)           | 6440/35                 | 365 (300-⅝)             |
| CIRCLING      | 6740-1<br>553 (600-1) | 6800-1<br>613 (700-1) | 7040-2½<br>853 (900-2½) | 7260-3<br>1073 (1100-3) |

SW-1, 04 SEP 2025 to 02 OCT 2025

SW-1, 04 SEP 2025 to 02 OCT 2025