


RNAV (GPS) RWY 4

APCH CRS	Rwy Idg	5001
042°	TDZE	17
	Arpt Elev	18

[USN]

CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

RNP APCH		MISSED APPROACH: Climb to 2000 direct FOLEM and hold.		
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (129°F)				
ATIS ★	APP CON	NAVY CORPUS TOWER ★	GND CON	CLNC DEL
127.9 290.9	128.675 343.75	134.85 340.2	118.7 257.85	314.3
				ASR/ PAR

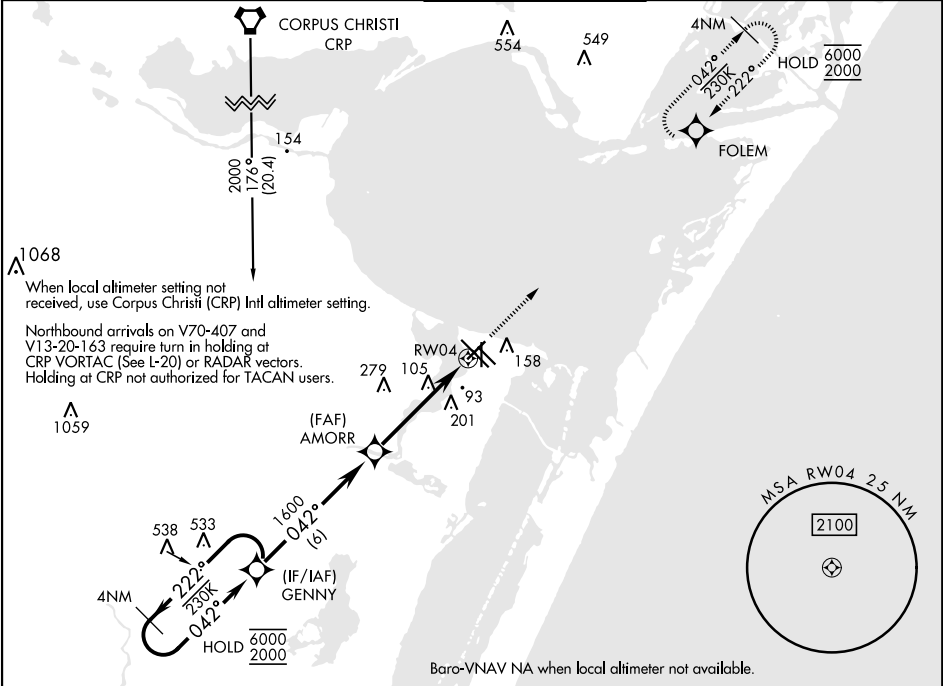

EMERG SAFE ALT 100 NM 11,100		4 NM Holding Pattern GENNY		VDP not authorized when using Corpus Christi (CRP) Intl altimeter setting.		2000	FOLEM
ELEV	18	TDZE	17				
		6000	2000	222°	042°		
				042°	1600		
						1 NM to RW04	
						4.8 NM	
		CATEGORY	A	B	C	D	
		LNAV/VNAV DA	267-¾		250	(300-¾)	
		LNAV MDA	400-1	383 (400-1)	400-1½	383 (400-1½)	
		CIRCLING	460-1	480-1	520-1½	580-2	
			442 (500-1)	462 (500-1)	502 (600-1½)	562 (600-2)	
		CORPUS CHRISTI (CRP) Intl ALTIMETER SETTING					
		LNAV MDA	420-1	403 (500-1)	420-1½	403 (500-1½)	
		CIRCLING	500-1	482 (500-1)	540-1½	620-2	
					522 (600-1½)	602 (700-2)	

RNAV (GPS) RWY 4

SC-3, 04 SEP 2025 TO 02 OCT 2025

SC-3, 04 SEP 2025 TO 02 OCT 2025