
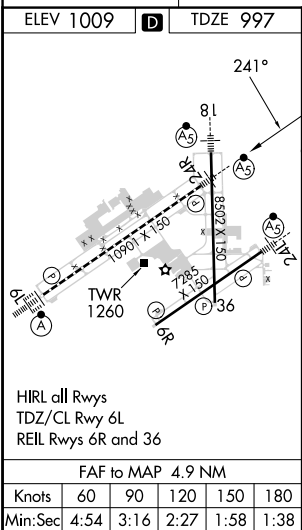


LOC/DME I-VUQ 111.9 Chan 56	APP CRS 241°	Rwy Idg 10900 TDZE 997 Apt Elev 1009
---	------------------------	---

ILS or LOC RWY 24R
JAMES M COX DAYTON INTL (DAY)

Simultaneous approach authorized. For inop ALS, increase S-LOC 24R Cat C/D visibility to RVR 6000.		MALSR 	MISSED APPROACH: Climb to 3000 then right turn direct DQN VOR/DME and hold.	
ATIS 125.8	COLUMBUS APP CON 134.45 323.15	DAYTON TOWER 119.9 257.7	GND CON 121.9	CLNC DEL 121.75

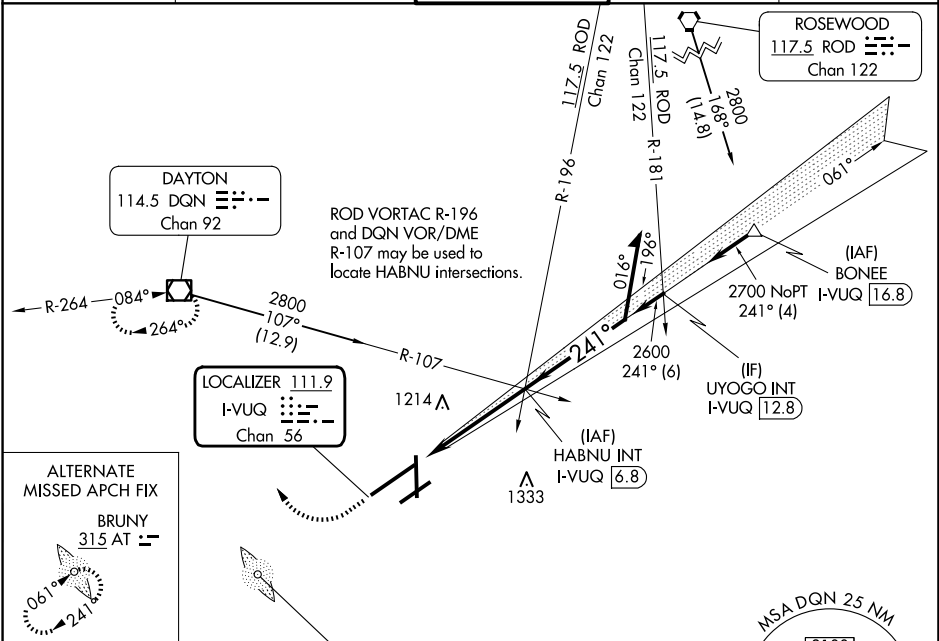

ELEV 1009		D		TDZE 997	
LOM BRUNY 315 AT		A 2049			
3000				HABNU INT I-VUQ 6.8	
I-VUQ 3		I-VUQ 2		2600	
1.1 NM		3.8 NM		GS 3.00° TCH 55	
CATEGORY	A	B	C	D	
S-ILS 24R	1203/24		206 (200-½)		
S-LOC 24R	1400/24		403 (400-½)		1400/40 403 (400-¾)
CIRCLING	1580-1		571 (600-1)		1580-1½ 571 (600-½)
					1640-2 631 (700-2)