

WAAS CH 45500 W07A	APP CRS 070°	Rwy Idg TDZE Apt Elev	9810 30 34
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 7L


DAYTONA BEACH INTL (DAB)

Inoperative table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. For inoperative MALSR, increase LNAV/VNAV visibility all Cats to 1¼ and increase LNAV Cats A/B visibility to RVR 5000 and Cats C/D visibility to RVR 6000.

MALSR

MISSED APPROACH:
Climb to 1600 direct
GILNE and hold.

ATIS 132.875	DAYTONA APP CON 125.8 269.075	DAYTONA TOWER 120.7 257.8	GND CON 121.9 348.6	CLNC DEL 119.3
------------------------	---	-------------------------------------	-------------------------------	--------------------------

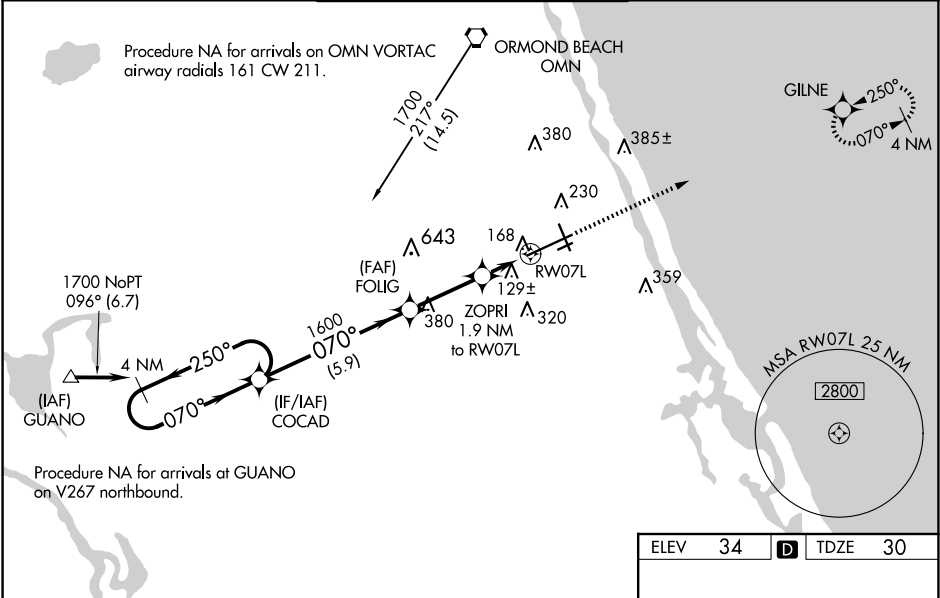

4 NM Holding Pattern		COCAD		FOLIG		ZOPRI		RW07L	
1700		1600		1600		1600		1600	
GP 3.00° TCH 58		GP 3.00° TCH 58		GP 3.00° TCH 58		GP 3.00° TCH 58		GP 3.00° TCH 58	
250°		070°		070°		070°		070°	
070°		070°		070°		070°		070°	
5.9 NM		2.9 NM		0.8 NM		1.1 NM		1.1 NM	
CATEGORY		A		B		C		D	
LPV DA		230/40		200 (200-¾)					
LNAV/VNAV DA		429/45		399 (400-⅞)					
LNAV MDA		420/40		390 (400-¾)					
CIRCLING		540-1 506 (600-1)		680-1¾ 646 (700-1¾)		700-2 666 (700-2)			

