

LOC I-DHN	APP CRS	Rwy Idg	8496
108.3	318°	TDZE	382
		Apt Elev	401

ILS or LOC RWY 32

DOTHAN RGNL (DHN)

▼


▲

For inop ALS, increase S-ILS 32 Cat E visibility to RVR 4000, S-LOC 32 Cat C/D/E visibility to 2½ SM, and S-LOC 32 FEKRA fix minimums Cat C/D/E visibility to RVR 5000.
**RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 on hdg 130° and on RRS VORTAC R-089 to BLALY INT/RRS VORTAC 19.8 DME and hold.

ATIS	CAIRNS APP CON*	DOTHAN TOWER ★	GND CON	UNICOM
135.725	125.4 327.125	118.4 (CTAF) 0 257.6	121.7 348.6	122.95

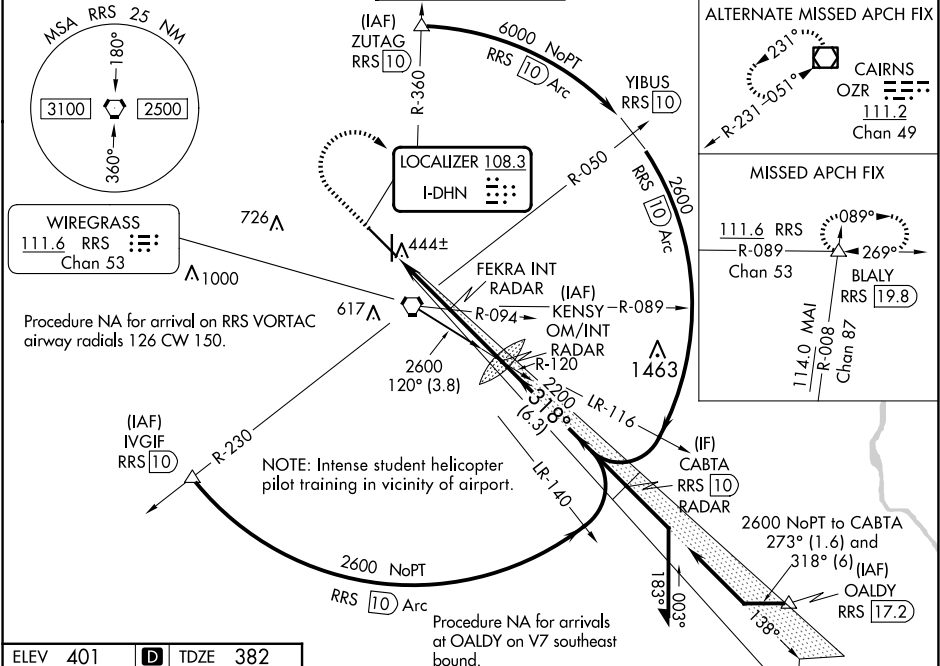

ELEV 401

D

TDZE 382

1000

3000

RRS R-089

BLALY

KENSY OM/INT RADAR

Remain within 15 NM

2167

138°

2300

318°

2200

GS 3.00°

TCH 57

2.7 NM

2.6 NM

FEKRA INT RADAR

1220

1220

CATEGORY	A	B	C	D	E		
S-ILS 32 **	582/24 200 (200-½)						
S-LOC 32	1220/24 838 (900-½)	1220/40 838 (900-¾)	1220-1½ 838 (900-1½)				
CIRCLING	1220-1¼ 819 (900-1¼)	1220-2½ 819 (900-2½)	1220-2¾ 819 (900-2¾)	1220-3 819 (900-3)			
FEKRA FIX MINIMUMS (DUAL VOR RECEIVERS OR RADAR REQUIRED)							
S-LOC 32	720/24 338 (400-½)	720/26 338 (400-½)					
CIRCLING	860-1 459 (500-1)	920-1½ 519 (600-1½)	1040-2 639 (700-2)	1040-2½ 639 (700-2½)			