


APP CRS	Rwy Ldg	9025
085°	TDZE	3940
	Apt Elev	3962

RNAV (RNP) X RWY 8R

EL PASO INTL (ELP)

RNP AR APCH. RF required.		MISSED APPROACH: Climb to 4400 then climbing right turn to 7500 direct FABAN and hold.
ASR	For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C.	

D-ATIS 120.0 254.3	EL PASO APP CON 124.25 298.85	EL PASO TOWER 118.3 239.275	GND CON 121.9 348.6	CLNC DEL 125.0 379.1
-----------------------	----------------------------------	--------------------------------	------------------------	-------------------------

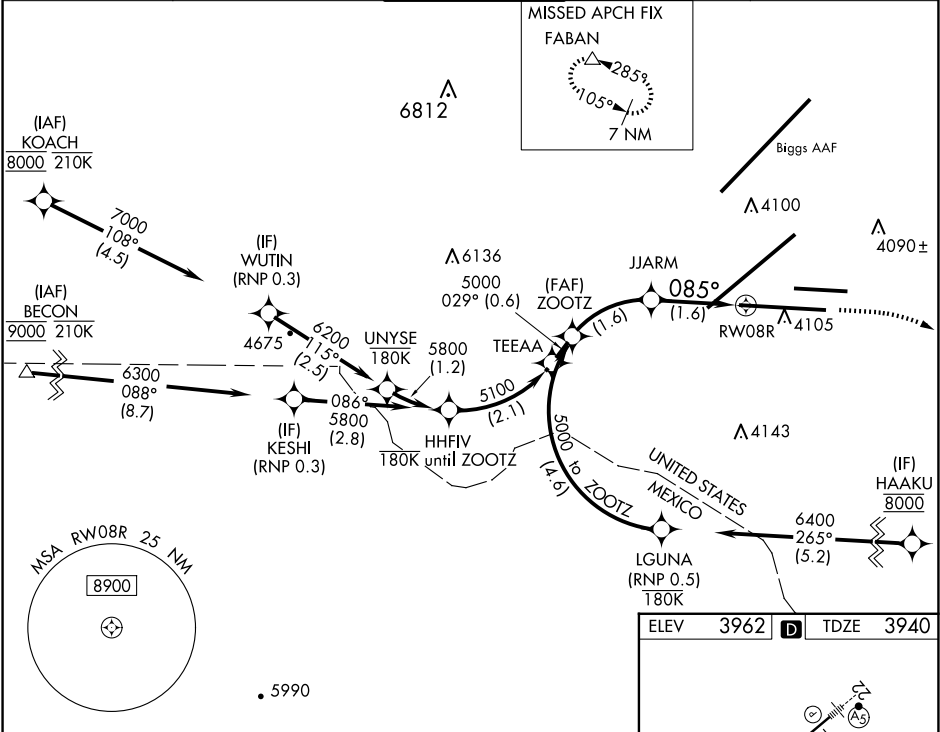

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 75).					4400	7500	FABAN
ZOOTZ 5000							
GP 3.00° TCH 50							
See planview for multiple IF locations.							
CATEGORY	A	B	C	D			
RNP 0.20 DA	4193-¾		253 (300-¾)				
RNP 0.30 DA	4234-⅞		294 (300-⅞)				
AUTHORIZATION REQUIRED							

085°

12020 X 150
0.3% DOWN

5499 X 75
0.5% UP

9025 X 150
0.3% DOWN

TWR

26L 26R

MIRL Rwy 8L-26R

HIRL Rwy 4-22 and 8R-26L

REIL Rwy 4 and 8R

MIRL Rwy 8L-26R
HIRL Rwy 4-22 and 8R-26L
REIL Rwy 4 and 8R