

WAAS CH 69599 W23A	APP CRS 230°	Rwy Ldg 11981 TDZE 799 Apt Elev 815
--	------------------------	--

RNAV (GPS) RWY 23
FORT WAYNE INTL (FWA)


 TASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000
direct EBACO and hold.

ATIS	FORT WAYNE APP CON	FORT WAYNE TOWER	GND CON	CLNC DEL
121.25 360.825	127.2 284.6	119.1 269.325	121.9 348.6	124.75

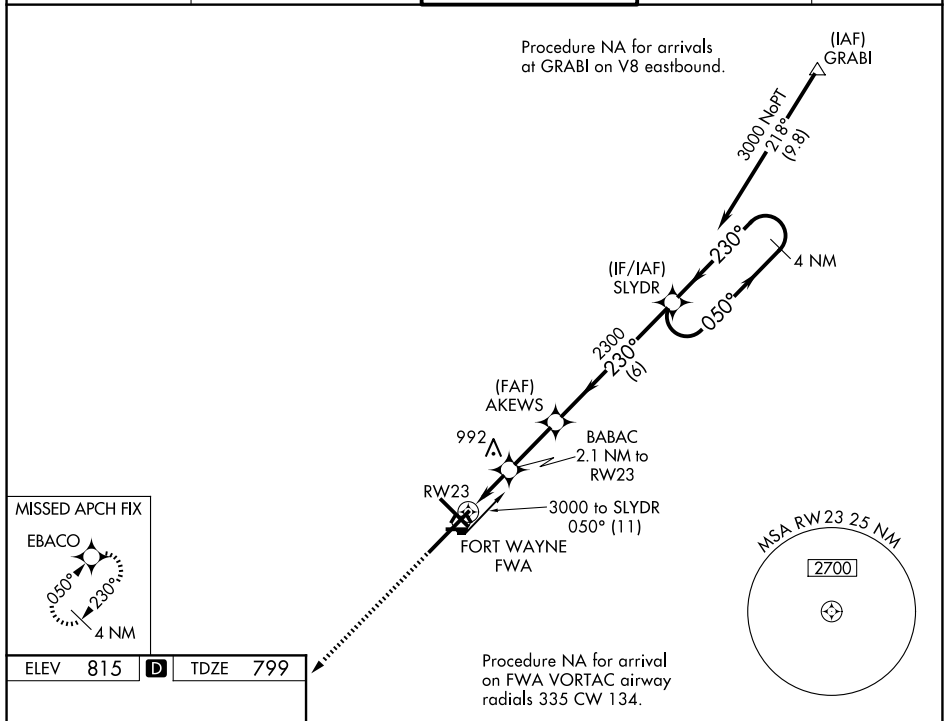


Diagram illustrating the RW23 approach procedure. Key elements include:

- Heading: 230°
- Distances: 8002 x 1.50, 4001 x 75, 1981 x 1.50, 1.3 NM to RW23, 0.8 NM, 2.4 NM, 6 NM, and 4 NM Holding Pattern.
- Angles: 0.3°
- Obstacles: TWR (Tower)
- GP 3.00° TCH 55

Diagram illustrating the RW23 approach procedure. Key elements include:

- Heading: 230°
- Distances: 8002 x 1.50, 4001 x 75, 1981 x 1.50, 1.3 NM to RW23, 0.8 NM, 2.4 NM, 6 NM, and 4 NM Holding Pattern.
- Angles: 0.3°
- Obstacles: TWR (Tower)
- GP 3.00° TCH 55

FORT WAYNE, INDIANA
Amdt 2A 27APR17

40°59'N-85°12'W

FORT WAYNE INTL (FWA)
RNAV (GPS) RWY 23

EC-2, 04 SEP 2025 to 02 OCT 2025

EC-2, 04 SEP 2025 to 02 OCT 2025