

VOR OLK
110.4

APP CRS
114°

Rwy Ldg
TDZE
Apt Elev
2623
836
836

VOR RWY 13
SMITH FLD (SMD)

▼

⚠

NA


❄

-22°C

Rwy 13 helicopter visibility reduction below 1 SM NA. Procedure NA at night. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all MDA 40 feet and S-13 Cat C visibility 1/8 SM.

MISSED APPROACH: Climb to 1900 then climbing left turn to 2700 direct OLK VOR and hold.

AWOS-3 124.55	FORT WAYNE APP CON 127.2 284.6	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

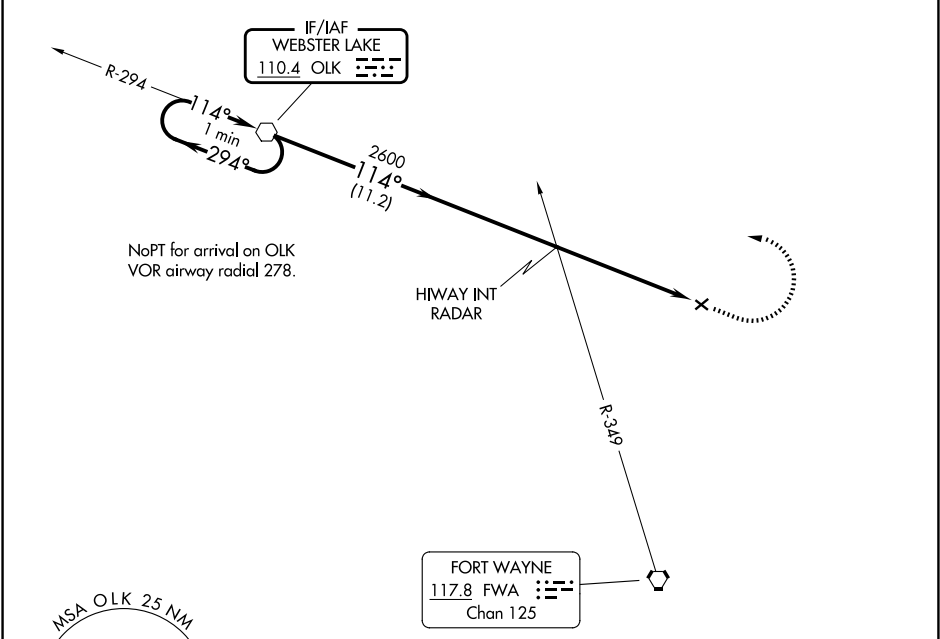

ELEV 836 TDZE 836

One Minute Holding Pattern

OLK VOR

1900 2700 OLK

2700 294° 114° 114°

HIWAY INT RADAR

2600 3.00° TCH 40

11.2 NM 5.4 NM

CATEGORY	A	B	C	D
S-13	1360-1 524 (600-1)	1360-1½ 524 (600-1½)	1940-3 1104 (1200-3)	NA
CIRCLING	1400-1 564 (600-1)			NA

MIRL Rwy 5-23 and 13-31 0

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

EC-2, 04 SEP 2025 to 02 OCT 2025

EC-2, 04 SEP 2025 to 02 OCT 2025