


HI-TACAN Y RWY 18

TACAN NFW Chan 24	APCH CRS 172°	Rwy Idg 11,999 TDZE 636 Arpt Elev 650	[USN]	FORT WORTH NAS JRB (CARSWELL FLD) (KNFW)
FUZ VORTAC or RADAR required.			MISSED APPROACH: Climb to 3000 direct LYLEE to intercept FUZ VORTAC R-218 to MOLKE and hold.	
 * Circling not authorized E of Rwy 18-36.				

ATIS★ 351.675	LONE STAR APP CON 125.8 257.95	NAVY FORT WORTH TOWER★ 120.950 269.325	GND CON 121.675 279.575	CLNC DEL 126.4 254.325	ASR/ PAR
------------------	-----------------------------------	---	----------------------------	---------------------------	-------------

When local altimeter is not received use Fort Worth Meacham altimeter setting.

CAUTION: Intermediate length 5.4 NM less than minimum 6 NM for CAT C-E.

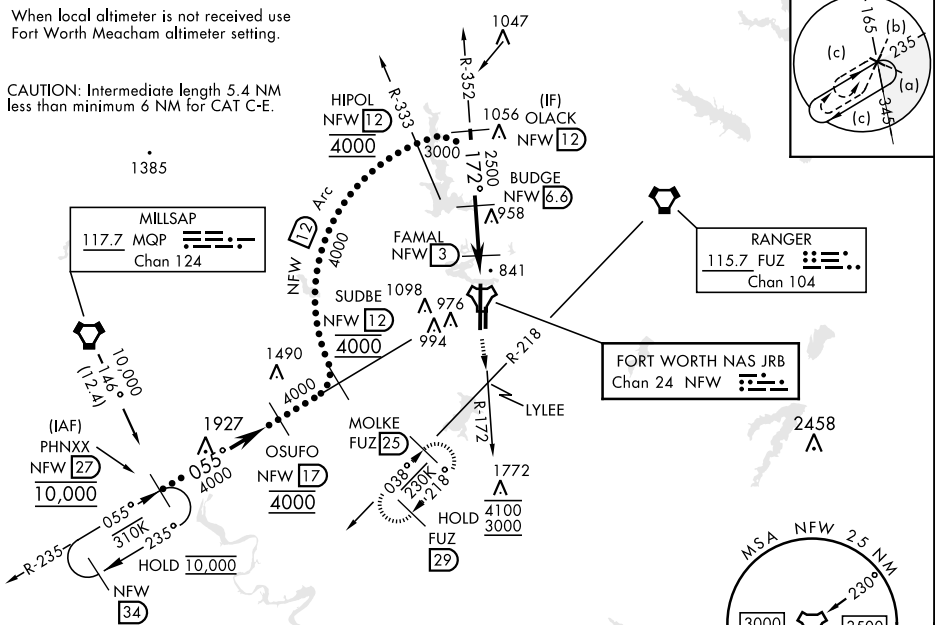

EMERG SAFE ALT 100 NM 4000

†VDP NA when using FTW altimeter setting

OLACK NFW 12

BUDGE NFW 6.6

FAMAL NFW 3

HIKDI NFW 1.4

3000

2500

1360

1300

172°

2.98° TCH 62

3.6 NM

1.6 NM

†VDP NA when using FTW altimeter setting

OLACK NFW 12

BUDGE NFW 6.6

FAMAL NFW 3

HIKDI NFW 1.4

3000

2500

1360

1300

172°

2.98° TCH 62

3.6 NM

1.6 NM

†VDP NA when using FTW altimeter setting

ELEV 650

TDZE 636

REIL Rwy 18-**L**

HIRL Rwy 18-36**L**

8L

(P)

(H)

☆

TWR

11,999 x 200

(H)

ASSAULT STRIP

3996 x 60

357'

(P)

A1

36

HI-TACAN Y RWY 18