

LOC/DME I-UYJ	APP CRS	Rwy Ldg
111.9	273°	11245
Chan 56		TDZE 653
		Apt Elev 680

ILS or LOC RWY 27C

CHICAGO O'HARE INTL (ORD)


From VOGLR: RNAV 1-GPS required. Aircraft not GPS equipped - RADAR required for procedure entry. DME or RADAR required.

Simultaneous approach authorized. For inop ALS, increase S-LOC 27C Cat C/D visibility to 1½ SM.

ALS-2

MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 on heading 290° and CGT R-322 to UKUNE INT/ CGT 48 DME and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON (TWR NORTH)	(TWR CENTER)	CLNC DEL	CPDLC
135.4	119.0 292.125	121.15 348.0	124.125	121.75	121.6	
282.225			118.05	121.9		
			226.675	(IBND)		
			(ALL TWRs)			

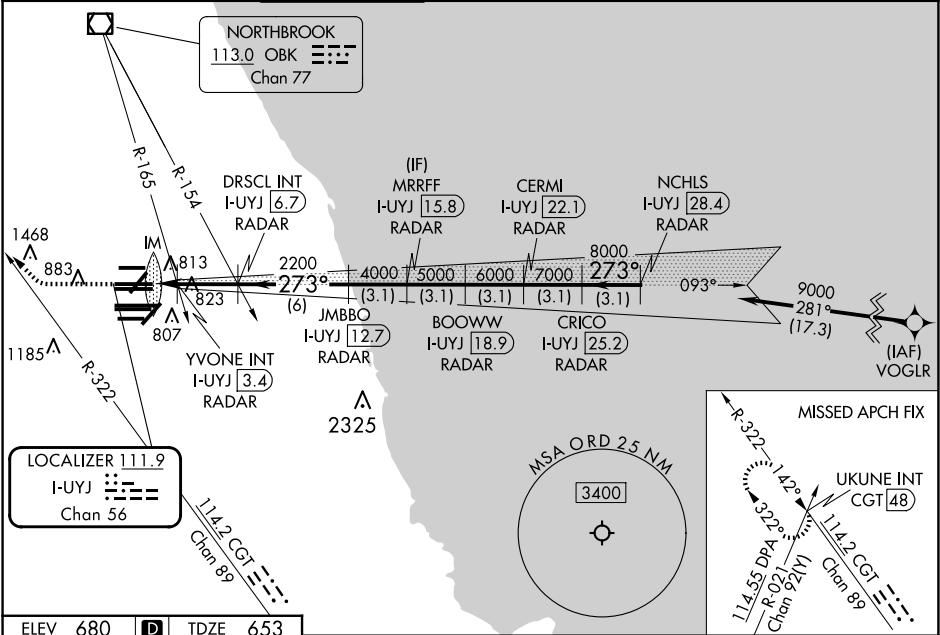

ELEV 680	D	TDZE 653
HIRL all Rwws TDZ/CL all Rwws except 4L		
FAF to MAP 4.7 NM		
Knots	60	90 120 150 180
Min:Sec	4:42	3:08 2:21 1:53 1:34
CATEGORY	A	B C D
S-ILS 27C	853/18 200 (200-½)	
S-LOC 27C	1160/24 507 (500-½)	1160/55 507 (500-1)
YVONE FIX MINIMUMS (DUAL VOR RECEIVERS or DME REQUIRED)		
S-LOC 27C	1080/24 427 (400-½)	1080/40 427 (400-¾)