

WAAS CH 53413 W01A	APP CRS 006°	Rwy Idg 5393 TDZE 1015 Apt Elev 1048
--	------------------------	---

RNAV (GPS) RWY 1

GREENVILLE DOWNTOWN (GMU)

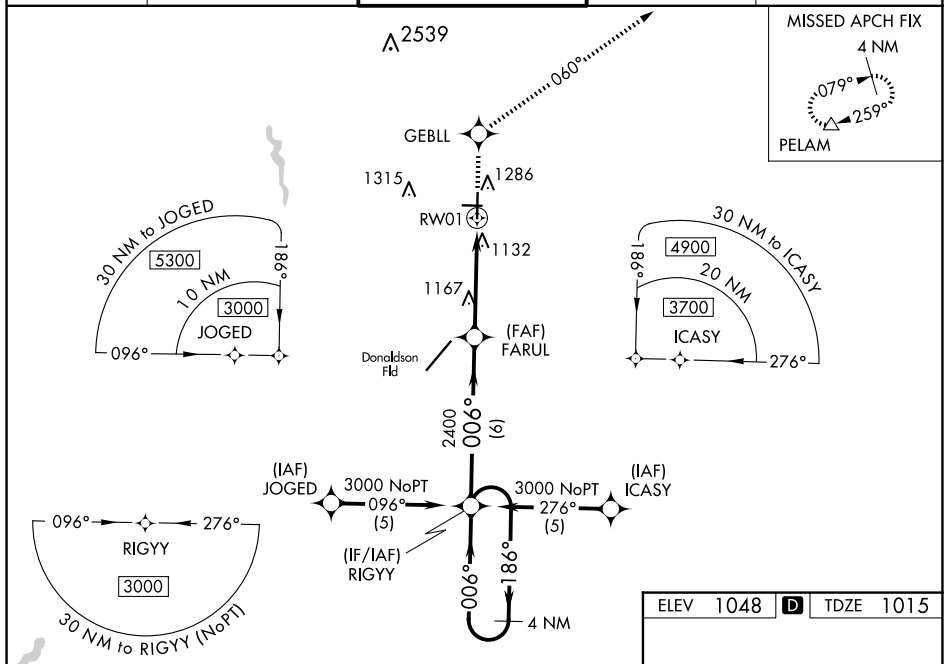
V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Greer altimeter setting. When local altimeter setting not received, use Greer altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV and LNAV/VNAV all Cats, LNAV Cat D and Circling Cat C visibility ¼ mile. Inop table does not apply to LNAV/VNAV all Cats and LNAV Cat C.

MALSF



MISSED APPROACH:
Climb to 3400 direct
GEBLL and via track
060° to PELAM and
hold.

ATIS 127.075	GREER APP CON ★ 118.8 270.275	GREENVILLE TOWER ★ 119.9 (CTAF) 0 257.7	GND CON 121.25	UNICOM 122.95
-----------------	----------------------------------	--	-------------------	------------------

[illegible]

ELEV 1048 TDZE 1015

10 28 6L

TWR 1094

4000 X 80

0.5% UP

5393 X 100

1.1% UP

006°

REIL Rwy 28

REIL Rwy 19

MIRL Rwy 10-28

HIRL Rwy 1-19