


HI-ILS Y or LOC Y RWY 35L



LOC I-EFD 111.1	APCH CRS 354°	Rwy Idg 9001 TDZE 28 Arpt Elev 33	[USAF]	ELLINGTON (KEFD)
DME required. RADAR required for procedure entry.			MALSF	MISSED APPROACH: Climb to 500 then climbing right turn to 3100 via EFD TACAN R-136 to WATFO/EEF 16 DME and hold.
▼ * When ALS inop, increase CAT CDE RVR to 60. ** Circling not authorized W of rwy 17L-35R				

ATIS 135.575 269.9	HOUSTON APP CON 134.45 284.0	TOWER 126.05 253.5	GND CON 121.6 275.8
---	---	---	--

EFD TACAN	N29°36.36' W95°09.58'
CANDI	N29°39.24' W95°18.17'
DROPP	N29°13.63' W95°32.07'
WATFO	N29°23.90' W94°58.07'

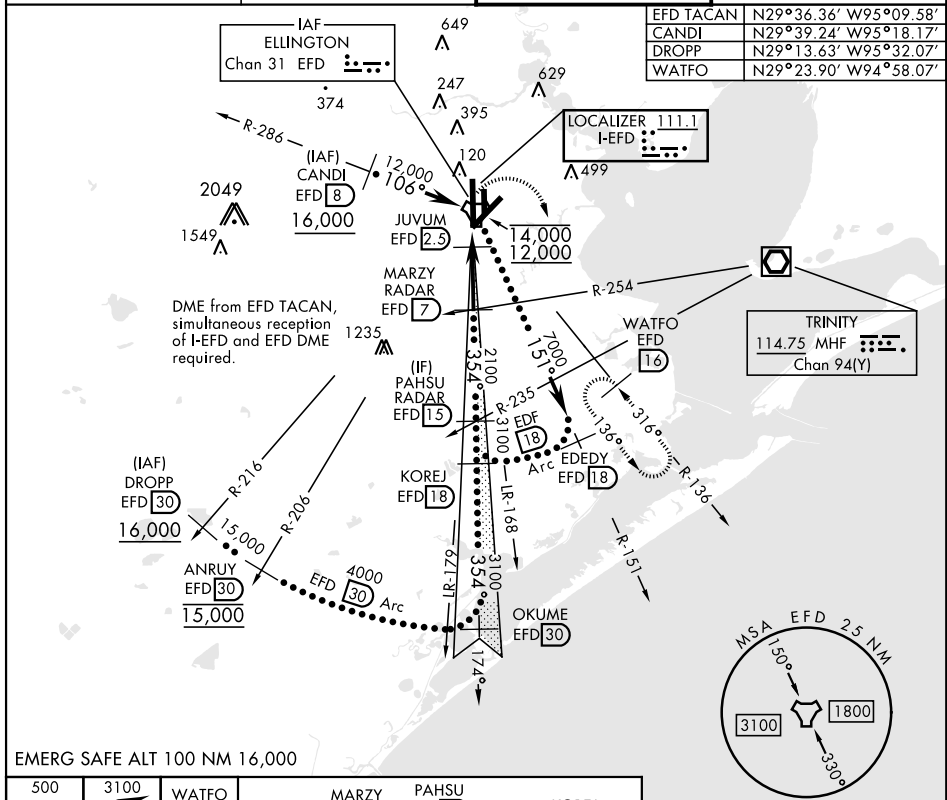

EMERG SAFE ALT 100 NM 16,000

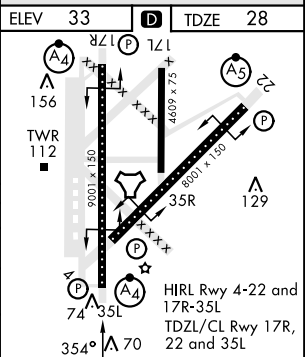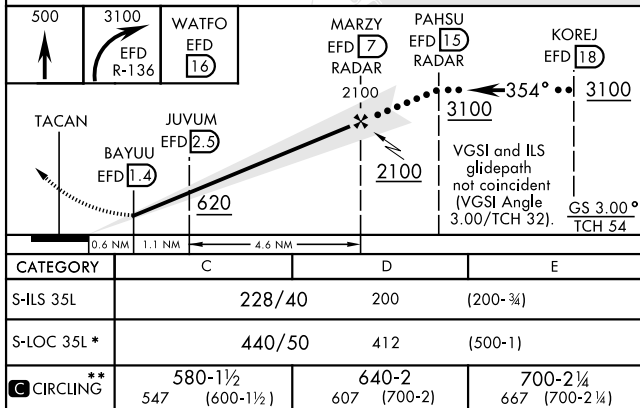

HI-ILS Y or LOC Y RWY 35L