LUFKIN THREE DEPARTURE

ATIS
135.575 269.9
GND CON
121.6 275.8
ELLINGTON TOWER
126.05 253.5
HOUSTON DEP CON
134.45 284.0

TOP ALTITUDE: ASSIGNED BY ATC

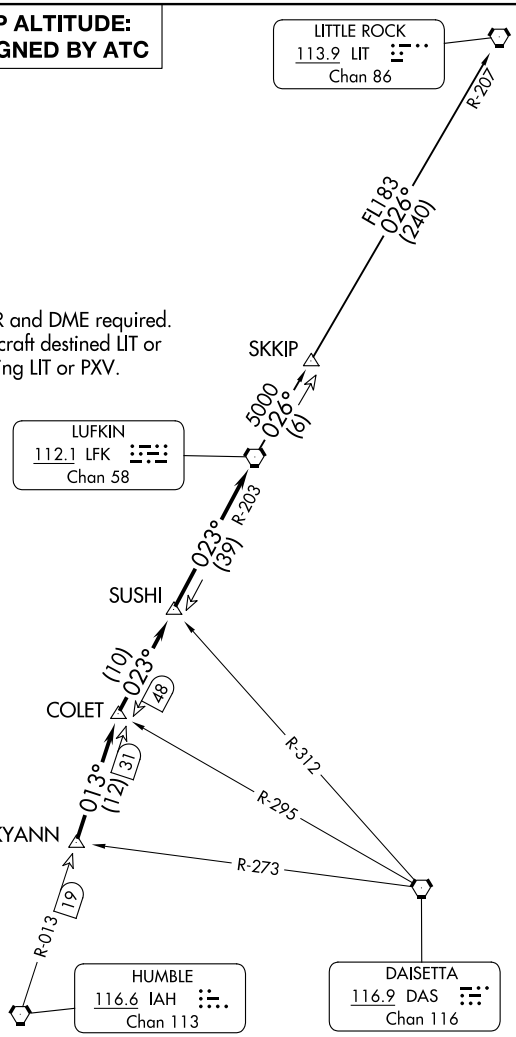

NOTE: RADAR and DME required.
NOTE: For aircraft destined LIT or overflying LIT or PXV.

TAKEOFF MINIMUMS
Rwys 4, 17L/R, 35L/R: Standard.
Rwy 22: 200-1¼ or standard with minimum climb of 214′ per NM to 300 or alternatively with standard takeoff minimums and a normal 200′ per NM climb gradient, takeoff must occur no later then 1400′ prior to DER.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)