


WAAS CH 61111 W22A	APP CRS 219°	Rwy Idg 8001 TDZE 31 Apt Elev 33
--	------------------------	---

RNAV (GPS) RWY 22


ELLINGTON (EFD)

RNP APCH.	MALSR	MISSED APPROACH: Climb to 500 then climbing left turn to 3100 direct WATFO and hold.
Circling NA west of Rwy 17R - 35L. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500, and LNAV Cats C/D/E visibility to RVR 5500.		

ATIS 135.575 269.9	HOUSTON APP CON 134.45 284.0	ELLINGTON TOWER 126.05 253.5	GND CON 121.6 275.8
------------------------------	--	--	-------------------------------

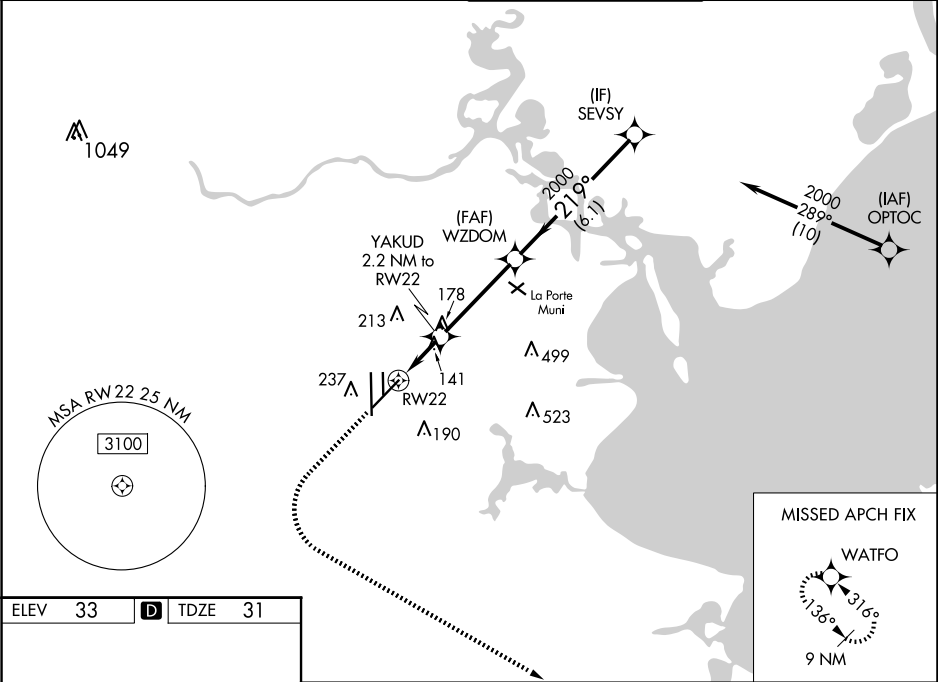

ELEV 33	D	TDZE 31
----------------	----------	----------------

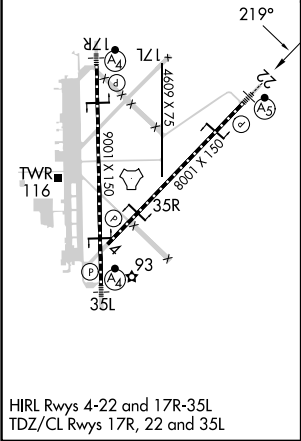

HIRL Rwy 4-22 and 17R-35L
TDZ/CL Rwy 17R, 22 and 35L