

APP CRS	Rwy Ldg	11200
050°	TDZE	747
	Apt Elev	796

RNAV (RNP) Z RWY 5L

INDIANAPOLIS INTL (IND)

For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). GPS required. For inop ALS, increase RNP 0.30 all Cats visibility to 1½ SM. Simultaneous approach authorized.

ALSF-2



MISSED APPROACH:
Climbing left turn to
3000 direct KEADY
and hold.

D-ATIS
134.25


INDIANAPOLIS APP CON
128.175 317.8

INDY TOWER
120.9 251.1

GND CON
121.9

CLNC DEL
128.75 251.1

CPDLC

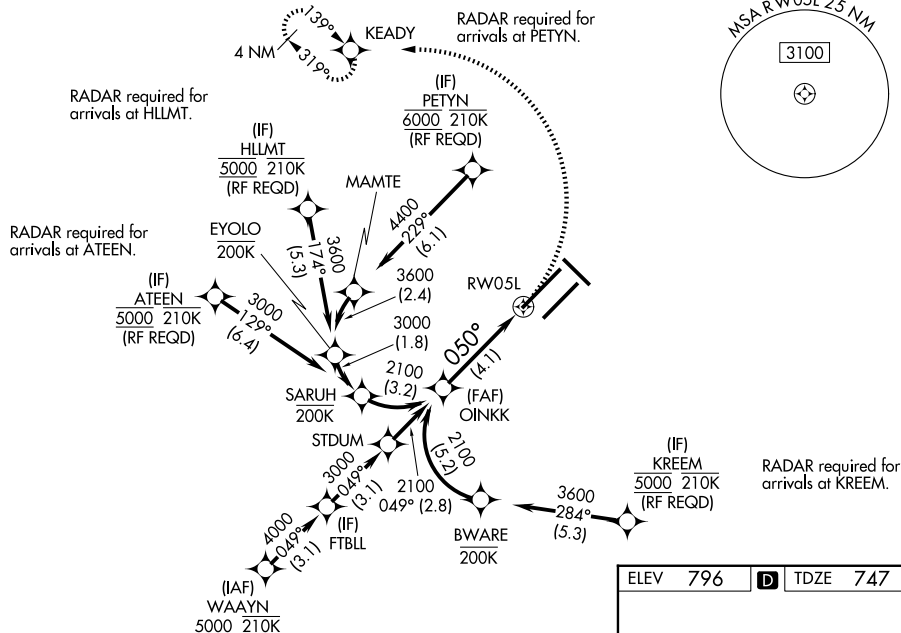

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 74).

3000	KEADY
------	-------

2100
GP 3.00%
TCH 53

See planview for multiple IF locations.

CATEGORY

A


C

D

RNP 0.30 DA	1197/60	450 (500-1¼)
-------------	---------	--------------

AUTHORIZATION REQUIRED

ELEV	796	D	TDZE	747
------	-----	----------	------	-----



HIRL all Rwy's
TDZ/CL Rwy's 5L and 5R