


LAKE FIVE DEPARTURE

NC-3, 04 SEP 2025 to 02 OCT 2025

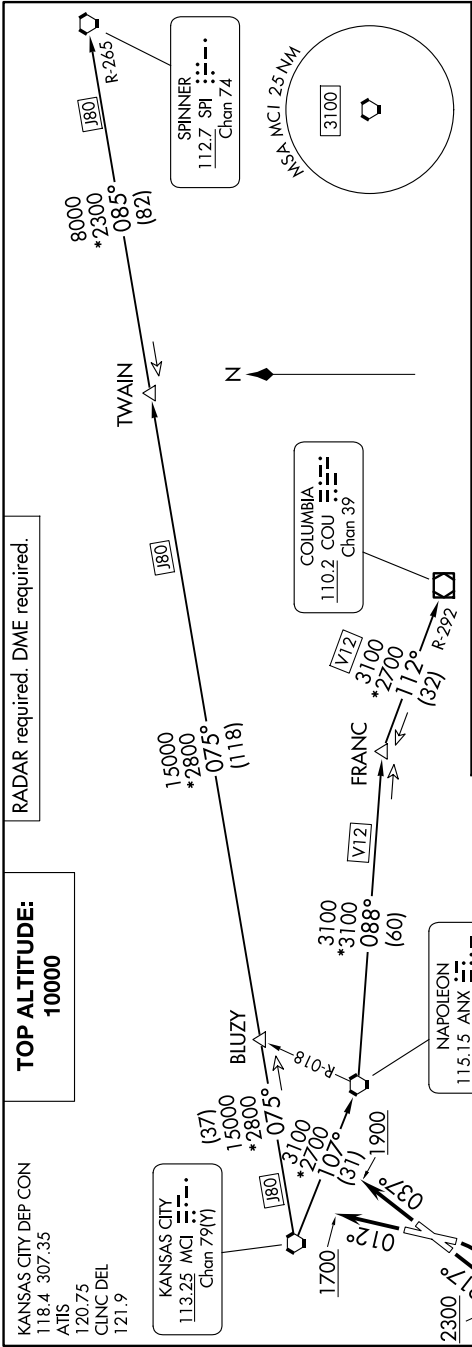

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 1: Climb on heading 012° to 1700, thence. . . .
TAKEOFF RUNWAY 4: Climb on heading 037° to 1900, thence. . . .
TAKEOFF RUNWAY 19: Climbing right turn heading 215° to 2500, thence. . . .
TAKEOFF RUNWAY 22: Climb on heading 217° to 2300, thence. . . .
. . . climb on assigned heading for RADAR vectors to appropriate route. Maintain 10000 or as assigned by ATC. Expect filed altitude 10 minutes after departure.
COLUMBIA TRANSITION (LAKES5.COU): From over MCI VORTAC on MCI R-107 to ANX VORTAC, then on ANX R-088 and COU R-292 to COU VOR/DME.
FRANC TRANSITION (LAKES5.FRANC): From over MCI VORTAC on MCI R-107 to ANX VORTAC, then on ANX R-088 to FRANC.
SPINNER TRANSITION (LAKES5.SPI): From over MCI VORTAC on MCI R-075 and SPI R-265 to TWAIN, then on SPI R-265 to SPI VORTAC.
TWAIN TRANSITION (LAKES5.TWAIN): From over MCI VORTAC on MCI R-075 and SPI R-265 to TWAIN.

TAKEOFF MINIMUMS

Rwy 1: 300-17' or standard with minimum climb of 201' per NM to 1000.
Rwy 4: Standard.
Rwy 19: Standard with minimum climb of 465' per NM to 2500.
Rwy 22: 300-15' or standard with minimum climb of 260' per NM to 1000.

NOTE: Chart not to scale.

LAKE FIVE DEPARTURE

NC-3, 04 SEP 2025 to 02 OCT 2025