

LOC I-TYS
110.3

APP CRS
051°

Rwy Ldg
TDZE **953**
Apt Elev **986**

ILS or LOC RWY 5L

MC GHEE TYSON (T'YS)

DME or RADAR required.

MALS

MISSED APPROACH: Climb to 4100 direct VXV VORTAC and on VXV VORTAC R-053 to NEYLN/VXV 4.7 DME and hold, continue climb-in-hold to 4100.


ATIS
128.35

KNOXVILLE APP CON
123.9 360.8

KNOXVILLE TOWER
121.2 257.8

GND CON
121.9 348.6

CLNC DEL
121.65

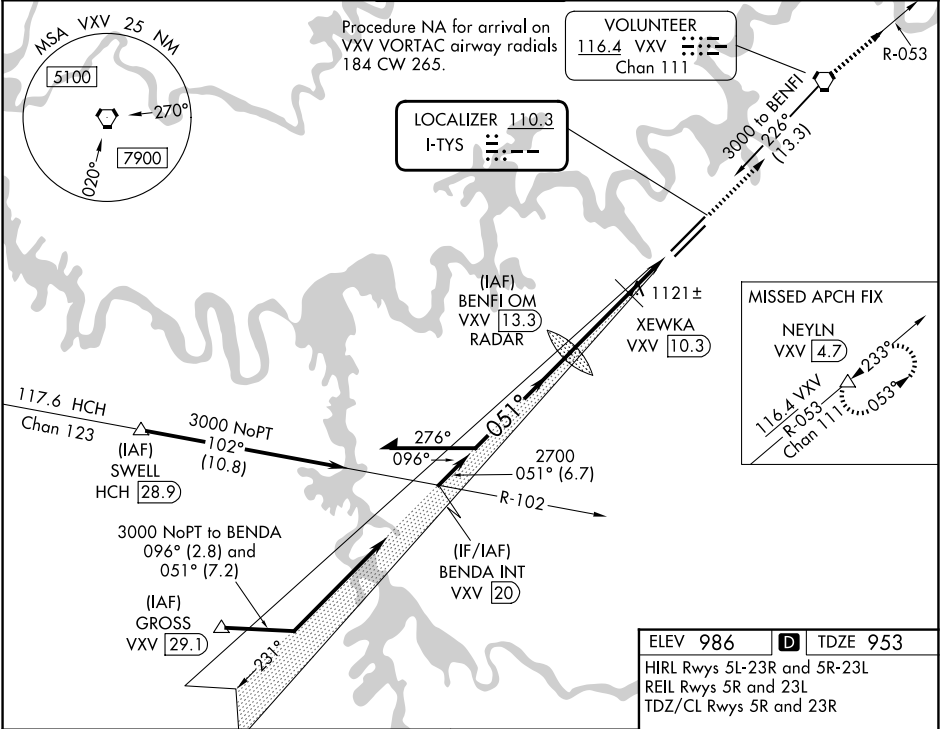

Remain within 10 NM

BENFI OM
VXV 13.3
RADAR

XEWKA
VXV 10.3

VXV
R-053

NEYLN
△

3000

231°

051°

2671

2700

1700

3 NM

2.2 NM

GS 3.00°
TCH 55

4100

VXV

VXV R-053

NEYLN

CATEGORY	A	B	C	D
S-ILS 5L		1153-1/2	200 (200-1/2)	
S-LOC 5L	1500-1/2	547 (600-1/2)	1500-1 1/8 547 (600-1 1/8)	
CIRCLING	1500-1 514 (600-1)	1560-1 574 (600-1)	1660-2 674 (700-2)	1900-3 914 (1000-3)

TWR

10000 Y 150

0.8% UP

9000 Y 150

0.5% UP

051°