



WAAS CH 81902 W23A	APP CRS 231°	Rwy Ldg TDZE 984 Apt Elev 986
--	------------------------	---

RNAV (GPS) RWY 23R

MC GHEE TYSON (TYS)

RNP APCH - GPS.	ALSF-2	MISSED APPROACH: Climb to 1600 then climb to 3000 direct GROSS and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.		

ATIS 128.35	KNOXVILLE APP CON 123.9 360.8	KNOXVILLE TOWER 121.2 257.8	GND CON 121.9 348.6	CLNC DEL 121.65
-----------------------	---	---------------------------------------	-------------------------------	---------------------------

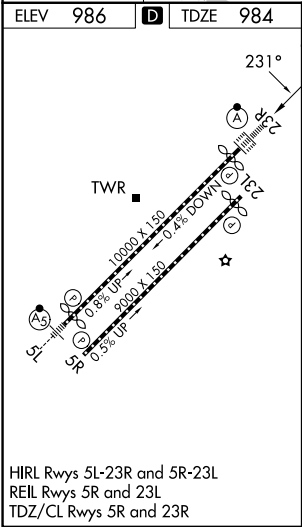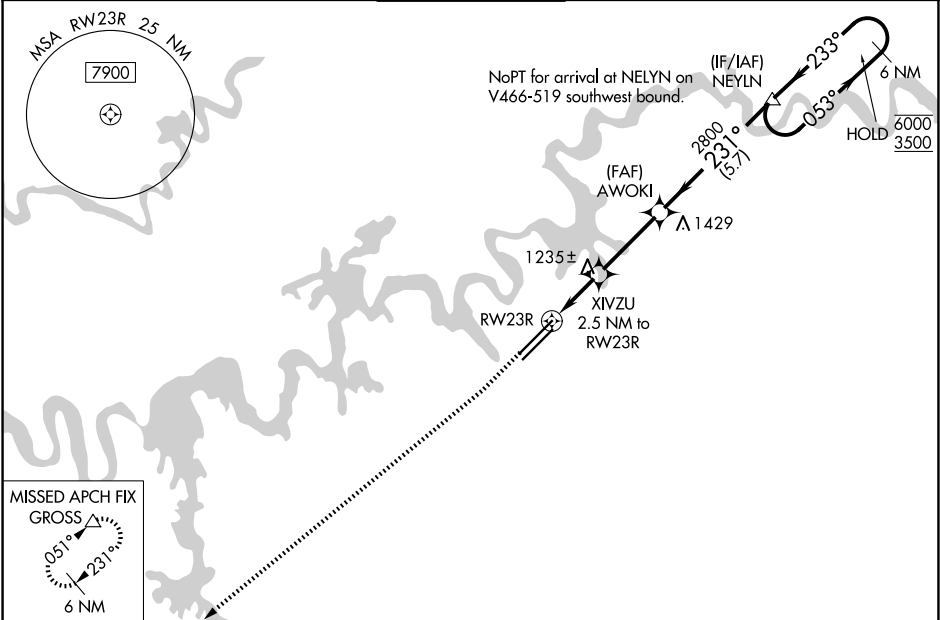

	1600	3000	GROSS				
	↑	↑	△				
				AWOKI	NELYN	6 NM	Holding Pattern
				XIVZU 2.5 NM to RW23R	2800	053° → 6000 ← 233° 3500	
				1.4 NM to RW23R	1820		GP 3.00° TCH 53
				1.4	1.1	3.1 NM	5.7 NM
CATEGORY	A	B	C	D			
LPV DA	1184/18		200 (200-½)				
LNAV/VNAV DA	1529-1½		545 (600-1½)				
LNAV MDA	1500/24	516 (600-½)		1500/55	516 (600-1)		
CIRCLING	1500-1 514 (600-1)	1560-1 574 (700-1)	1660-2 674 (700-2)	1900-3 914 (1000-3)			

SE-1, 04 SEP 2025 to 02 OCT 2025

SE-1, 04 SEP 2025 to 02 OCT 2025