

WAAS CH 40137 W17A	APP CRS 177°	Rwy Ldg TDZE 1219 Apt Elev 1219
--	------------------------	---

RNAV (GPS) RWY 17

LINCOLN (LNK)


⚠

Baro-VNAV NA when using Beatrice altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Beatrice altimeter setting and increase all DA 91 feet, and all MDA 100 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase LNAV Cats C/D and Circling Cats C/D visibility ¼ mile.

MISSED APPROACH:

Climb to 3300 direct HIVUV and hold.

ATIS 118.05 290.9	OMAHA APP CON 124.0 270.3	LINCOLN TOWER* 118.5(CTAF) 253.5	GND CON 121.9 275.8	CLNC DEL 120.7 225.4	UNICOM 122.95
-----------------------------	-------------------------------------	--	-------------------------------	--------------------------------	-------------------------

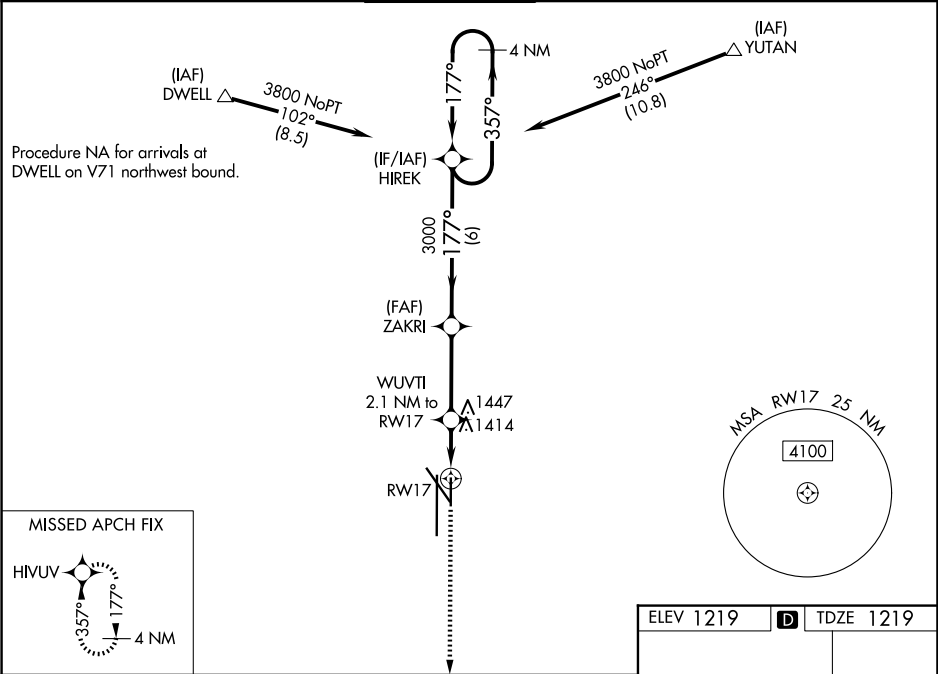

3300	HIVUV	WUVTI 2.1 NM to RW17	ZAKRI 3000	HIREK 3000	4 NM Holding Pattern	357°	3800
*LNAV only.		*1.3 NM to RW17				177°	
		1920*				3000	
		1.3 NM	0.8 NM	3.4 NM	6 NM		
CATEGORY		A	B	C	D		
LPV DA			1419-¾	200 (200-¾)			
LNAV/VNAV DA			1615-1⅜	396 (400-1⅜)			
LNAV MDA		1680-1	461 (500-1)	1680-1⅜	461 (500-1⅜)		
CIRCLING		1680-1 461 (500-1)	1760-1 541 (600-1)	1820-1¾ 601 (700-1¾)	1960-2½ 741 (800-2½)		

