

WAAS CH 50114 W18A	APP CRS 177°	Rwy Ldg 12901 TDZE 1195 Apt Elev 1219
--	------------------------	--

RNAV (GPS) RWY 18

LINCOLN (LNK)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Beairice altimeter setting and increase all DA 91 feet, all MDA 100 feet, increase LPV all Cats, LNAV Cats C and D, and Circling Cats C and D visibilities ¼ mile, and increase LNAV/VNAV all Cats visibility ½ mile. For inop MALS, when using Beairice altimeter setting increase LPV all Cats visibility to 1¼ mile. Baro-VNAV and VDP NA when using Beairice altimeter setting.

MALS

MISSED APPROACH:

Climb to 3700 direct GONBE and hold.

ATIS 118.05 290.9	OMAHA APP CON 124.0 270.3	LINCOLN TOWER* 118.5(CTAF) 253.5	GND CON 121.9 275.8	CLNC DEL 120.7 225.4	UNICOM 122.95
-----------------------------	-------------------------------------	---	-------------------------------	--------------------------------	-------------------------

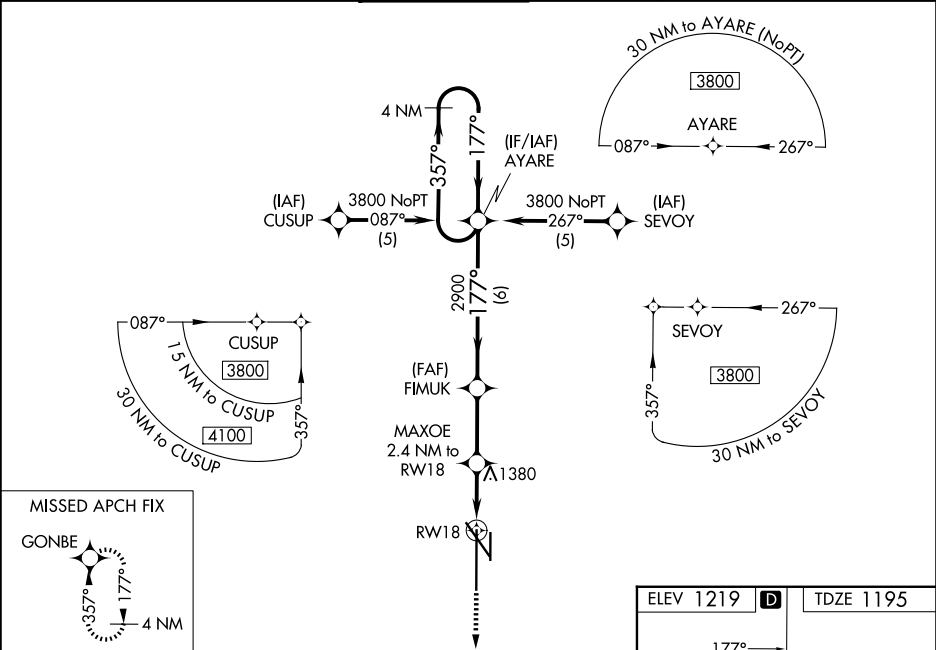

3700 GONBE		FIMUK AYARE 4 NM Holding Pattern			
*LNAV only RWY 18 *1.5 NM to RWY 18		MAXOE 2.4 NM to RWY 18 2900 357° → 3800 ← 177° GP 3.00° TCH 55			
→ 1.5 NM → 0.9 NM → 2.7 NM → 6 NM					
CATEGORY		A	B	C	D
LPV DA		1445/24		250 (300-½)	
LNAV/VNAV DA		1720/60		525 (600-1¼)	
LNAV MDA		1720/24	525 (600-½)	1720/50 525 (600-1)	1720/60 525 (600-1¼)
CIRCLING		1720-1 501 (600-1)	1760-1 541 (600-1)	1820-1¾ 601 (700-1¾)	1960-2½ 741 (800-2½)

