

|                                                 |                        |                                                                |
|-------------------------------------------------|------------------------|----------------------------------------------------------------|
| LOC/DME I-SNU<br><b>110.3</b><br>Chan <b>40</b> | APP CRS<br><b>170°</b> | Rwy Idg <b>10000</b><br>TDZE <b>485</b><br>Apt Elev <b>501</b> |
|-------------------------------------------------|------------------------|----------------------------------------------------------------|

ILS or LOC RWY 17R

LOUISVILLE MUHAMMAD ALI INTL (SDF)

RADAR required for procedure entry at CWAYN.  
DME or RADAR required.



Simultaneous approach authorized. Circling Rwy 11 NA at night.

For inop ALS, increase S-LOC 17R Cat C/D visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 on heading 275° and on IIU VORTAC R-279 to DAMEN INT/24.5 DME and hold.

|                          |                                            |                                        |                               |                                |       |
|--------------------------|--------------------------------------------|----------------------------------------|-------------------------------|--------------------------------|-------|
| D-ATIS<br><b>118.725</b> | LOUISVILLE APP CON<br><b>132.075 327.0</b> | LOUISVILLE TOWER<br><b>124.2 257.8</b> | GND CON<br><b>121.7 348.6</b> | CLNC DEL<br><b>126.1 275.8</b> | CPDLC |
|--------------------------|--------------------------------------------|----------------------------------------|-------------------------------|--------------------------------|-------|

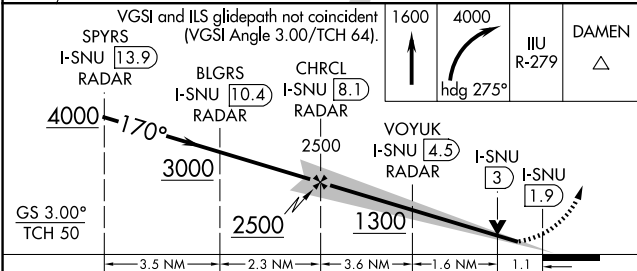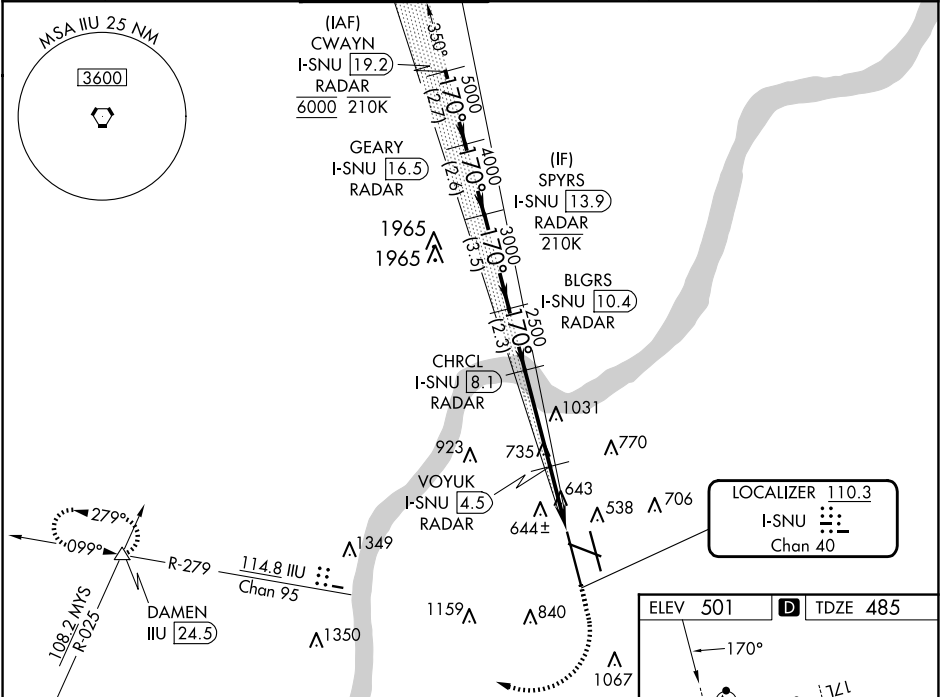

| CATEGORY  | A                     | B                     | C                       | D                     |
|-----------|-----------------------|-----------------------|-------------------------|-----------------------|
| S-ILS 17R | 685/18 200 (200-½)    |                       |                         |                       |
| S-LOC 17R | 900/24                | 415 (400-½)           | 900/40                  | 415 (400-¾)           |
| CIRCLING  | 1040-1<br>539 (600-1) | 1140-1<br>639 (700-1) | 1160-1¾<br>659 (700-1¾) | 1400-3<br>899 (900-3) |

