

WAAS CH 70709 W35D	APP CRS 350°	Rwy ldg TDZE 479 Apt Elev 501
--	------------------------	---

RNAV (GPS) Y RWY 35R


LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP APCH - GPS.


Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.
Use of FD or AP required during simultaneous operations. Circling Rwy 11 NA at night.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C.

ALSF-2 MISSED APPROACH:
Climb to 1600 then climbing right turn to 4000 direct TORAC and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6	CLNC DEL 126.1 275.8	CPDLC
--------------------------	--	--	-------------------------------	--------------------------------	-------

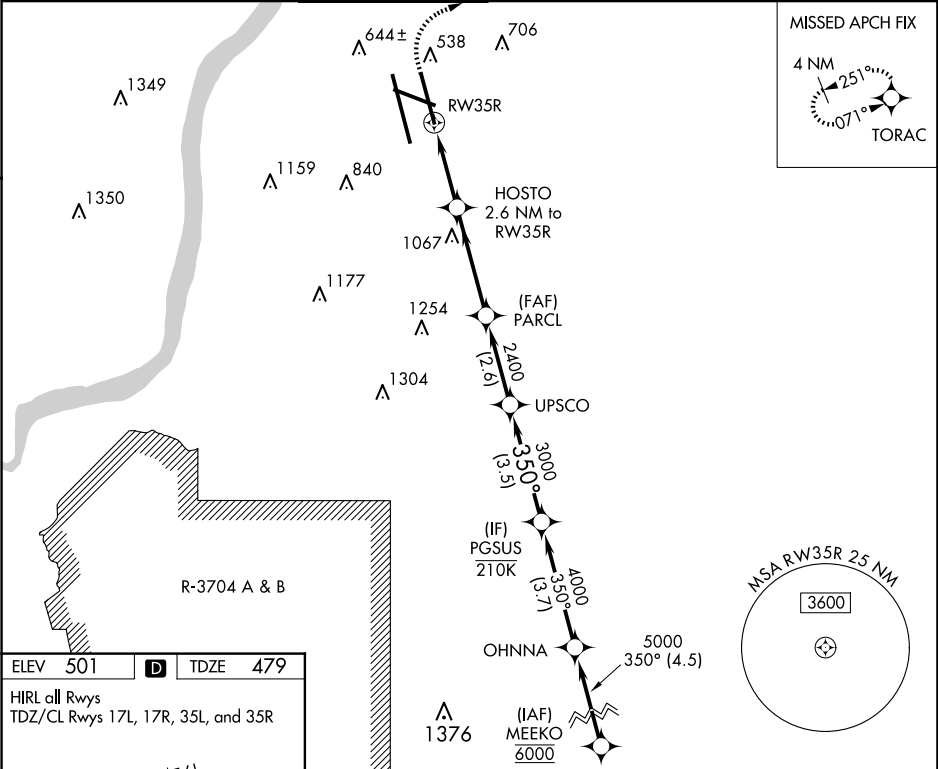

ELEV 501	D	TDZE 479
HIRL all Rwy's TDZ/CL Rwy's 17L, 17R, 35L, and 35R		

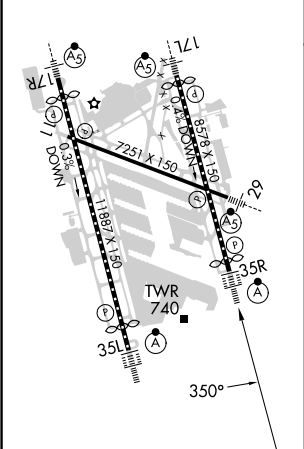

1600	4000	TORAC	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 71).			
1.4 NM to RW35R		HOSTO 2.6 NM to RW35R	PARCL 2400	UPSICO 3000	PGSUS 4000	GP 3.00° TCH 60
1.4		1.2 NM	3.3 NM	2.6 NM	3.5 NM	
CATEGORY	A		B		C	D
LPV DA	679/18		200 (200-½)			
LNAV/VNAV DA	901/40		422 (400-¾)			
LNAV MDA	1000/24 521 (500-½)		1000/55 521 (500-1)			
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)		