

VOR/DME	MLB	Rwy Ldg	10181
115.85	APP CRS	TDZE	32
Chan 105 (Y)	089°	Apt Elev	33

VOR RWY 9R


MELBOURNE ORLANDO INTL (MLB)

JEMDO FIX minimums: For inop MALSRL, increase S-9R Cats C and D visibility to RVR 6000.





MISSED APPROACH: Climb to 1000, then climbing left turn to 2100 direct MLB VOR/DME and hold, continue climb-in-hold to 2100.

ATIS	ORLANDO APP CON	MELBOURNE TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
132.55	126.025 281.425	118.2 (CTAF) 257.8	121.9	121.9	126.025 (When twr closed)	122.95

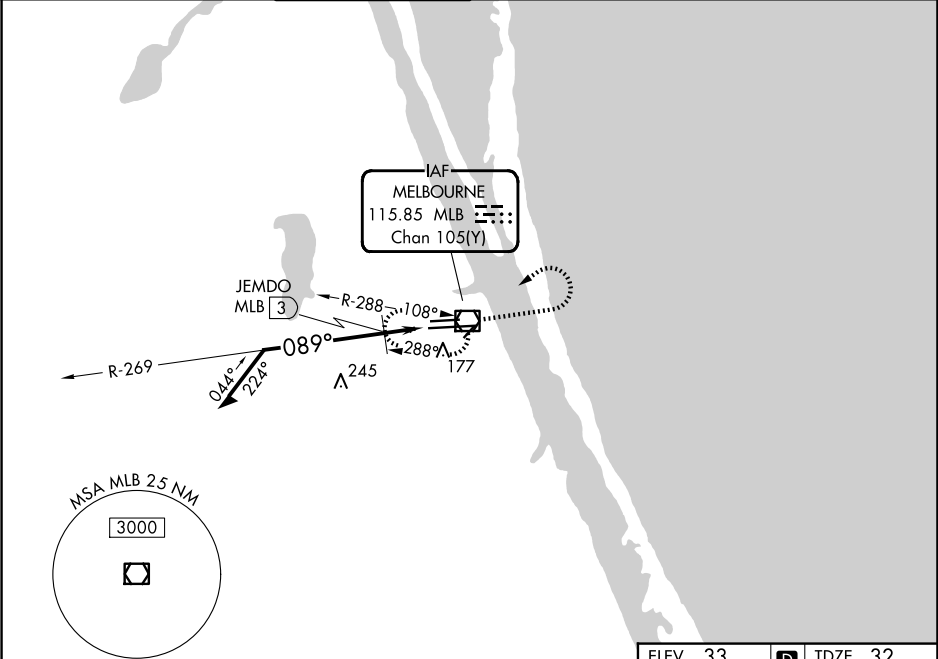

ELEV 33	TDZE 32
---------	---------

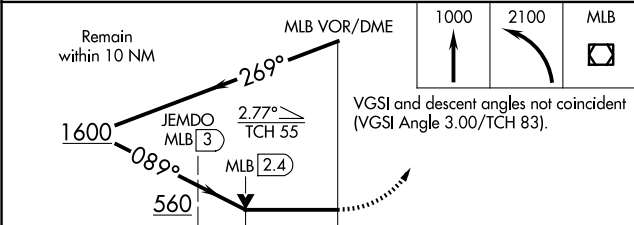

CATEGORY	A	B	C	D
S-9R	560/24	528 (600-½)	560/55	528 (600-1)
CIRCLING	560-1	527 (600-1)	680-1¾ 647 (700-1¾)	880-2¾ 847 (900-2¾)
JEMDO FIX MINIMUMS				
S-9R	440/24	408 (500-½)	440/40	408 (500-¾)
CIRCLING	560-1	527 (600-1)	680-1¾ 647 (700-1¾)	880-2¾ 847 (900-2¾)

REIL Rwy 27L 0
HIRL Rwy 9R-27L 0
MIRL Rwy 5-23 and 9L-27R 0
TDZ/CL Rwy 9R

SE-3, 04 SEP 2025 to 02 OCT 2025

SE-3, 04 SEP 2025 to 02 OCT 2025