

LOC 1-001 109.9	APP CRS 180°	Rwy Idg TDZE Apt Elev	9320 295 341
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 18R
MEMPHIS INTL (MEM)

Radars required for procedure entry, DME or RADAR required.



Simultaneous approach authorized. For inop ALS, increase S-ILS 18R Cat E visibility to RVR 4000, S-LOC 18R Cat E visibility to 2 SM, SAAMM fix minimums. increase S-LOC 18R Cat E visibility to 1½ SM.

MALSR


MISSED APPROACH: Climb to 900 then climbing right turn to 5000 on MEM VORTAC R-212 to JEPOB INT/UIM 20 DME and hold

MEMPHIS APP CON		MEMPHIS TOWER		GND CON	
119.1	291.6	(Rwy 9-27)	118.3 257.8	(Rwy 9-27)	121.0 379.2
	(176°-355°)	(Rwys 18C-36C, 18L-36R)	119.7 257.8	(Rwys 18C-36C, 18L-36R)	121.9 379.2
125.8	338.3	(Rwy 18R-36L)	128.425 257.8	(Rwy 18R-36L)	121.65 379.2
	(356°-175°)				

D-ATIS 127.75	1486 ^A	36 (IAF) RWSON	CLNC DEL 125.2	CPDLC
-------------------------	-------------------	----------------------	--------------------------	-------

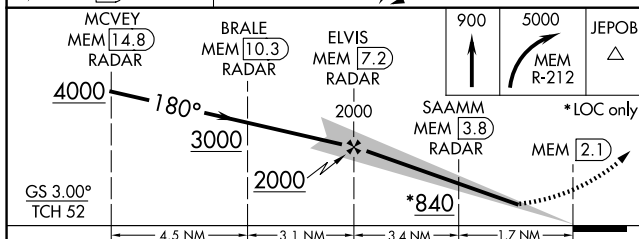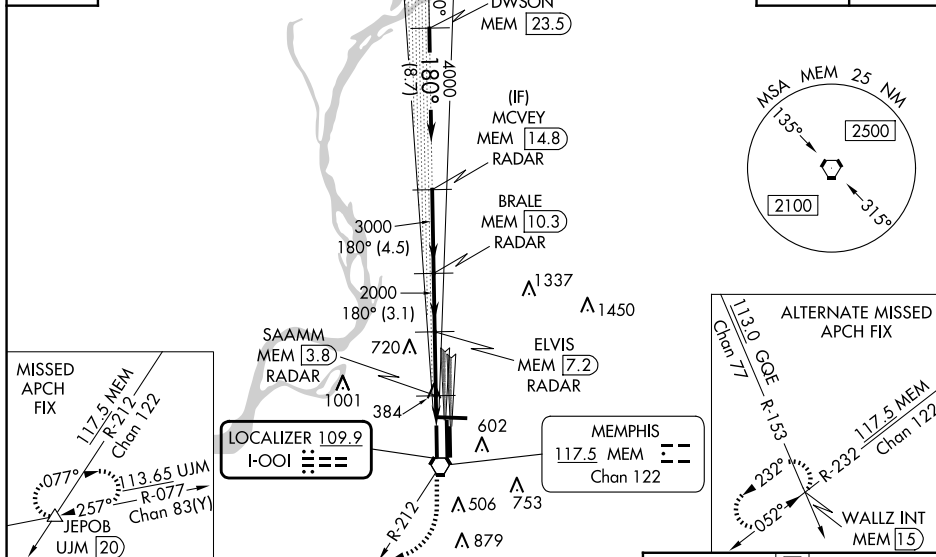

CATEGORY	A	B	C	D	E
S-ILS 18R	495/18 200 (200-½)				495/24 200 (200-½)
S-LOC 18R	840/24 545 (500-½)	840/50 545 (500-1)	840/60 545 (500-1¼)	840-1½ 545 (500-1½)	
CIRCLING	940-1 599 (600-1)	940-1½ 599 (600-1½)	1020-2¼ 679 (700-2¼)	1140-2¾ 799 (800-2¾)	
SAAMM FIX MINIMUMS (DME OR RADAR REQUIRED)					
S-LOC 18R	700/24 405 (400-½)	700/40 405 (400-¾)	700/40 405 (400-¾)	700/50 405 (400-1)	
CIRCLING	940-1 599 (600-1)	940-1½ 599 (600-1½)	1020-2¼ 679 (700-2¼)	1140-2¾ 799 (800-2¾)	

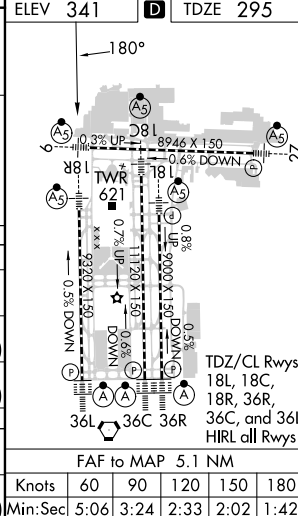

ILS or LOC RWY 18R

SE-1, 04 SEP 2025 to 02 OCT 2025

SE-1, 04 SEP 2025 to 02 OCT 2025