GLADZ FOUR DEPARTURE (RNAV)

RNAV-1 DME/DME/IRU or GPS.
RADAR required for NON-GPS equipped aircraft.
RADAR required.

TOP ALTITUDE: ASSIGNED BY ATC

NOTE: Jet aircraft only.
NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.
NOTE: SHAQQ and BAGGS transitions ATC assigned except aircraft departing MIA.

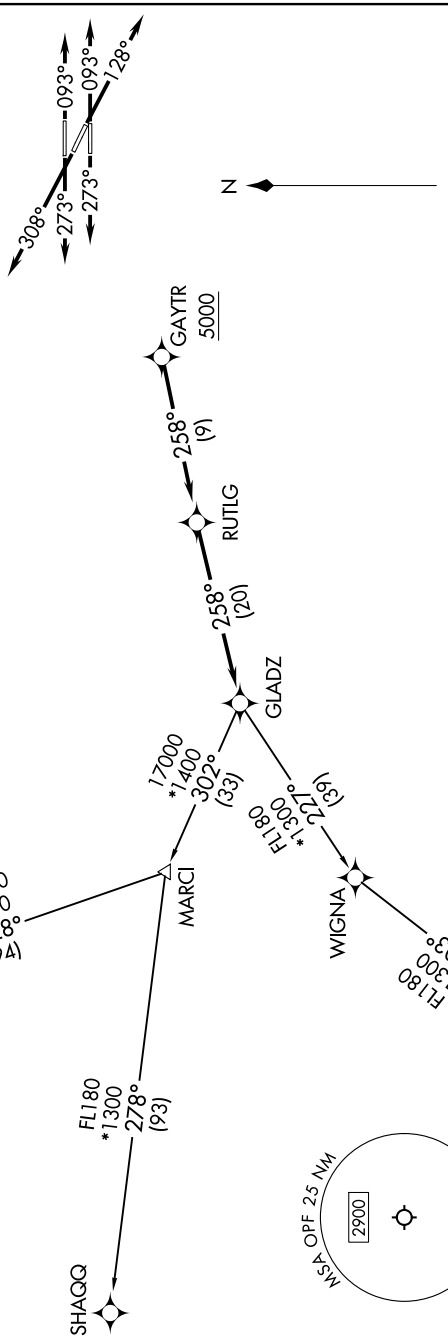

TAKEOFF MINIMUMS
Rwys 27L, 30: Standard.
Rwy 9L: Standard with minimum climb of 500'/NM to 1000.
Rwy 9R: Standard with minimum climb of 500'/NM to 700.
Rwys 12, 27R: Standard with minimum climb of 500'/NM to 600.

(CONTINUTED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-3, 04 SEP 2025 to 02 OCT 2025

GLADZ FOUR DEPARTURE (RNAV)

MIAMI, FLORIDA
MIAMI-OPA LOCKA EXEC (OPF)