

MIAMI, FLORIDA

AL-257 (FAA)



24137

APP CRS	Rwy Idg	7913
305°	TDZE	8
	Apt Elev	9

RNAV (RNP) Y RWY 30
MIAMI INTL (MIA)

	For inoperative MALS, increase RNP 0.23 all Cats visibility to 1½, RNP 0.30 all Cats to 1¾. GPS Required. For uncompensated Baro-VNAV systems, procedure NA below 6°C (42°F) or above 48°C (119°F).	MALS	MISSED APPROACH: Climb to 3000 direct VEPCO and via 342° track to BRBRA and hold.
---	---	-------------	--

D-ATIS		MIAMI APP CON		MIAMI TOWER		GND CON		CLNC DEL	CPDLC
ARR	119.15	124.85	322.3	118.3	256.9	121.8	(8L/8R/12/26L/26R)	348.6	135.35
DEP	133.675					127.5	(9/27/30)		

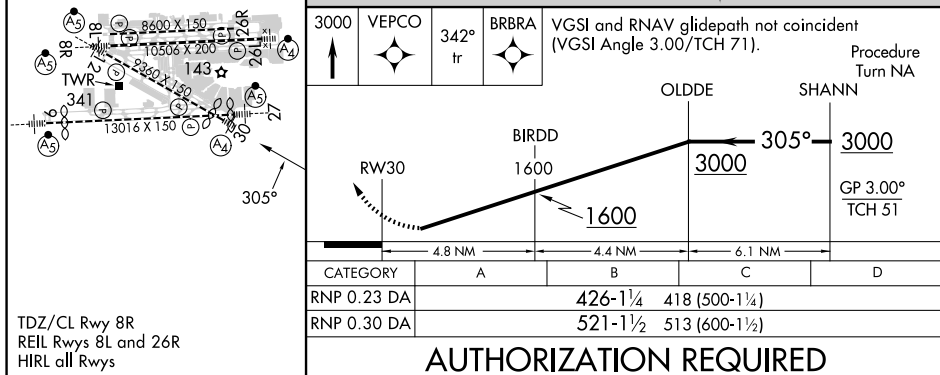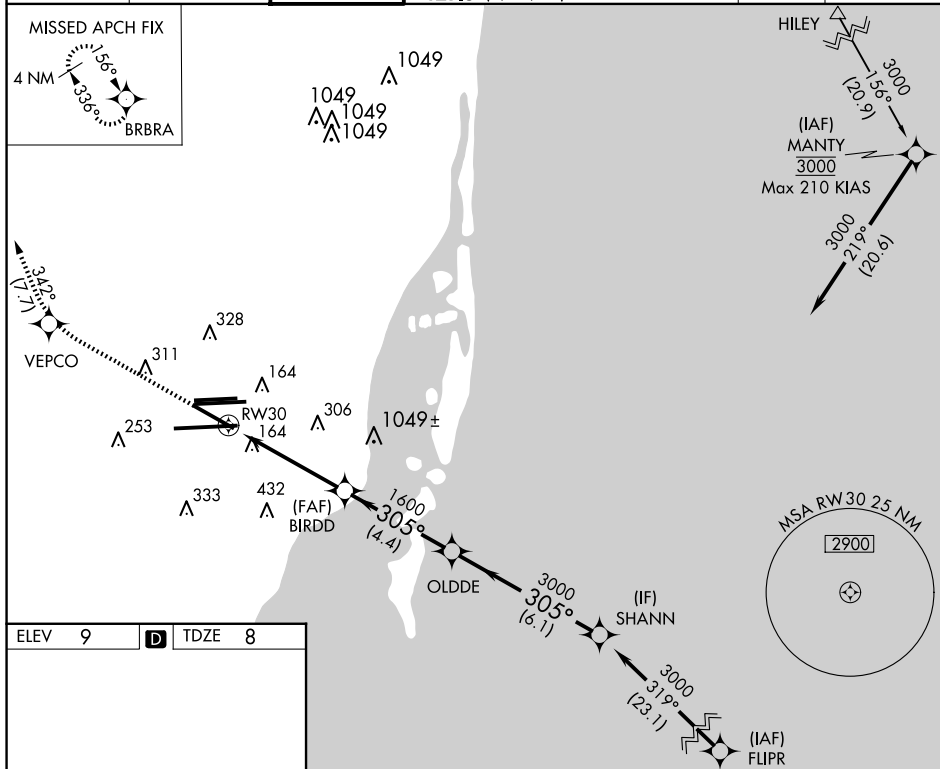

MIAMI, FLORIDA
Orig-A 30JUN11

25°48'N-80°17'W

MIAMI INTL (MIA)

RNAV (RNP) Y RWY 30

SE-3, 04 SEP 2025 to 02 OCT 2025