

MIAMI, FLORIDA

AL-257 (FAA)

24137

APP CRS	Rwy Idg	12755
272°	TDZE	9
	Apt Elev	9

RNAV (RNP) Z RWY 27
MIAMI INTL (MIA)

RNP AR APCH-GPS.





Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below 8°C or above 54°C. For inop ALS, increase RNP 0.11 visibility to RVR 4500 all Cats.

MALSR



MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.

D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON	CLNC DEL	CPDLC
ARR 119.15 DEP 133.675	124.85 322.3	118.3 256.9	121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30)	348.6 135.35	

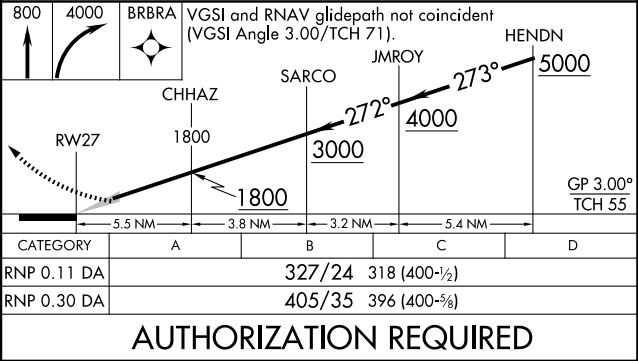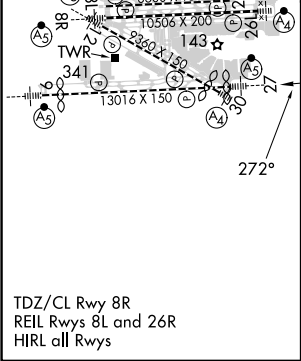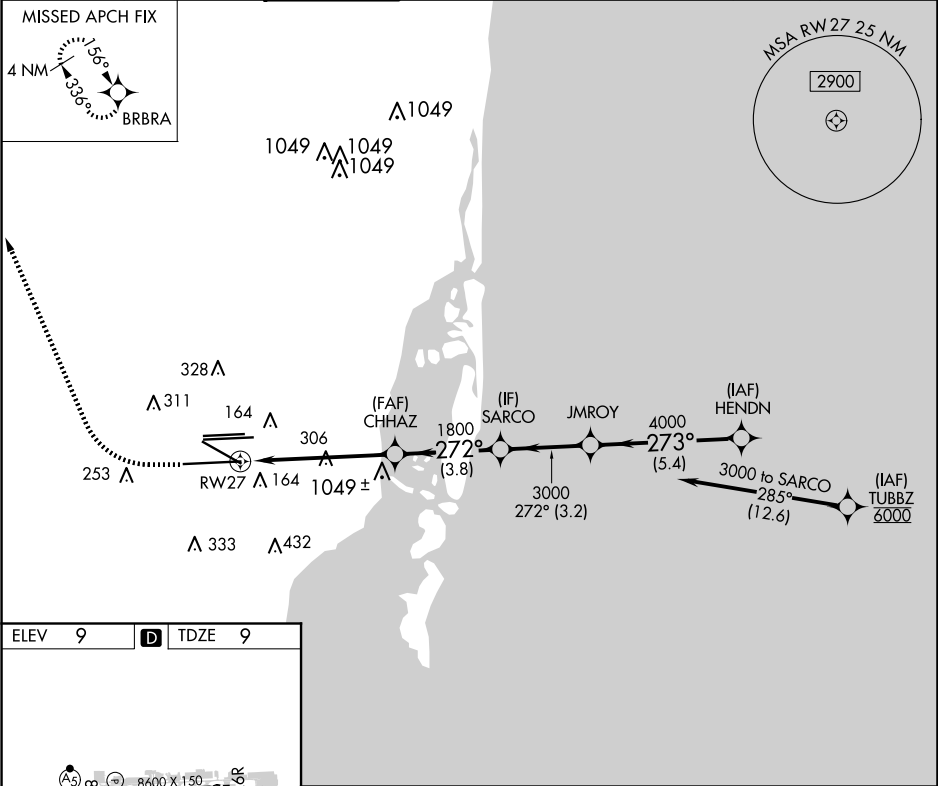

MIAMI, FLORIDA
Amdt 3 12AUG21

25°48'N-80°17'W

MIAMI INTL (MIA)

RNAV (RNP) Z RWY 27