

WAAS
CH **77924**
W22A

APP CRS
223°

Rwy Idg **5764**
TDZE **2630**
Apt Elev **2634**

RNAV (GPS) RWY 22

FRANK WILEY FLD (MLS)

RNP APCH-GPS.


▼

⚠

Baro-VNAV and VDP NA when using Glendive altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. When local altimeter setting not received, use Glendive altimeter setting: increase LPV and LNAV/VNAV DA to 3047 and all visibilities ½ SM. Increase all MDA 180 feet and LNAV Cat C and D visibilities ¾ SM and Circling Cat C and D visibilities ½ SM.

MISSED APPROACH: Climb to 6000 direct OPEJY and hold, continue climb-in-hold to 6000.

ASOS 135.575	SALT LAKE CENTER 126.85 305.2	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

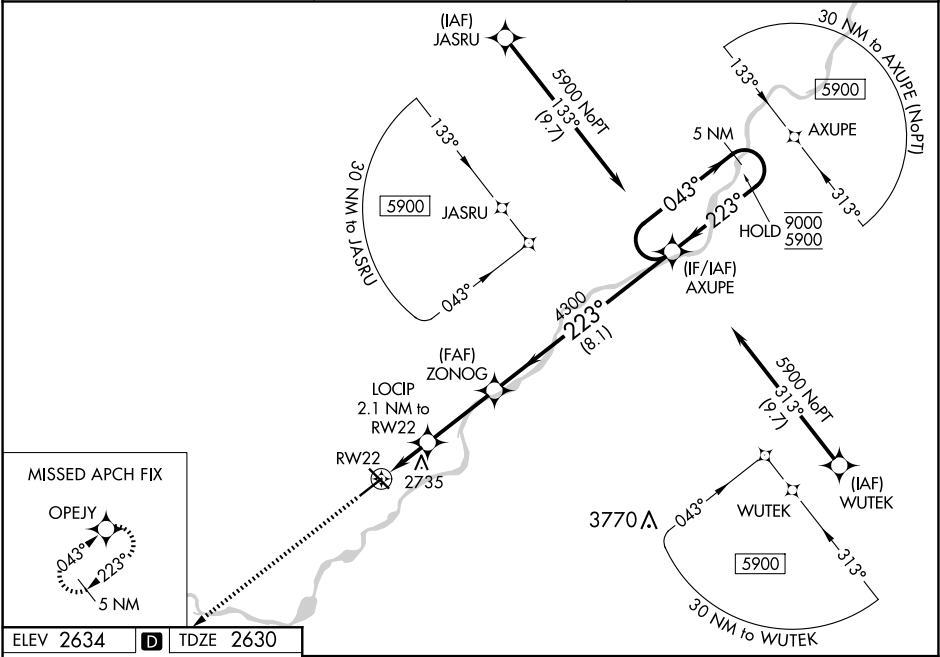

ELEV 2634 **D** TDZE 2630

6000 OPEJY

LOCIP 2.1 NM to RW22

ZONOG 4300

AXUPE 5 NM Holding Pattern

223° to RW22

1.1 NM to RW22

3320

4300

9000 5900

GP 3.00° TCH 41

CATEGORY	A	B	C	D
LPV DA		2880-1	250 (300-1)	
LNAV/VNAV DA		2880-1	250 (300-1)	
LNAV MDA		3000-1	370 (400-1)	
C CIRCLING	3060-1 426 (500-1)	3100-1 466 (500-1)	3160-1½ 526 (600-1½)	3320-2¼ 686 (700-2¼)