


WAAS CH 97442 W01B	APP CRS 011°	Rwy Ldg TDZE 678 Apt Elev 729
--	------------------------	---

RNAV (GPS) RWY 1R

GENERAL MITCHELL INTL (MKE)

RNP APCH.			MISSED APPROACH: Climb to 2900 direct CUSIT and hold.		
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.					
D-ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 124.575 269.05	GND CON 121.8 263.125	CLNC DEL 120.8	CPDLC

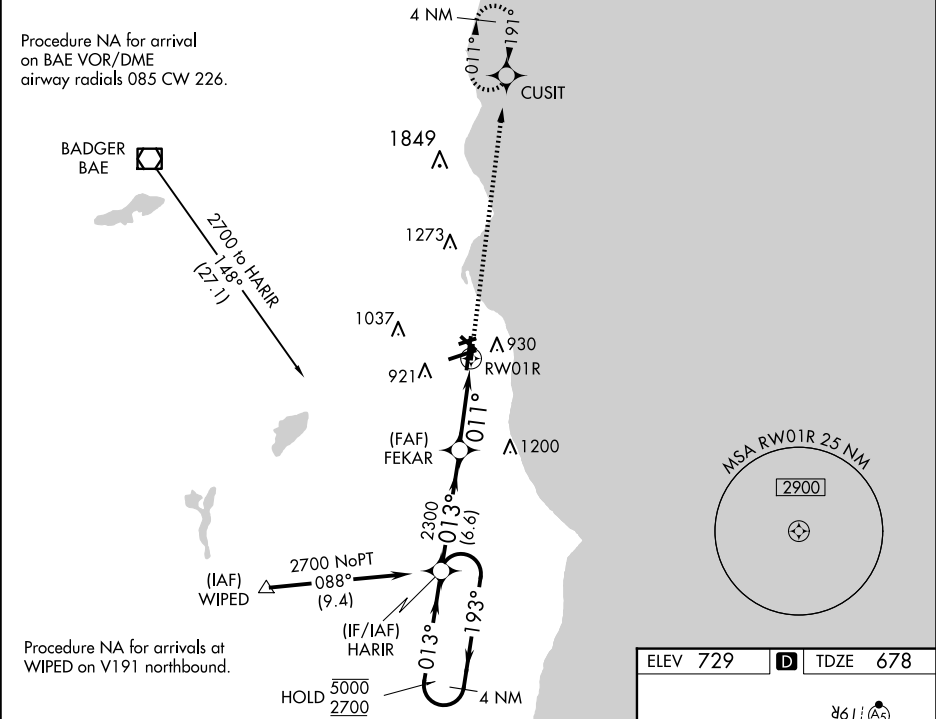

4 NM Holding Pattern		HARIR		2900		CUSIT
5000 ← 193°		← 013°		↑		✱
2700		013°		*1.3 NM to RWY 1R		*LNAV only
GP 3.00° TCH 45		FEKAR 2300		RWY 1R		
		6.6 NM		3.7 NM		1.3 NM
CATEGORY	A	B	C	D		
LPV DA	928-1		250 (200-1)			
LNAV/VNAV DA	1078-1½		400 (400-1½)			
LNAV MDA	1140-1 462 (500-1)		1140-1¾ 462 (500-1¾)			
CIRCLING	1240-1 511 (600-1)		1240-1½ 511 (600-1½)		1360-2 631 (700-2)	

