

APP CRS
256°


Rwy Ldg
TDZE
Apt Elev

7867
683
729

RNAV (RNP) Y RWY 25L


GENERAL MITCHELL INTL (MKE)

RF required. RNP AR APCH.				MISSED APPROACH: Climb to 3700 on the RNAV missed approach route to PROOT and hold.	
▼ For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C.					
D-ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 124.575 269.05	GND CON 121.8 263.125	CLNC DEL 120.8	CPDLC

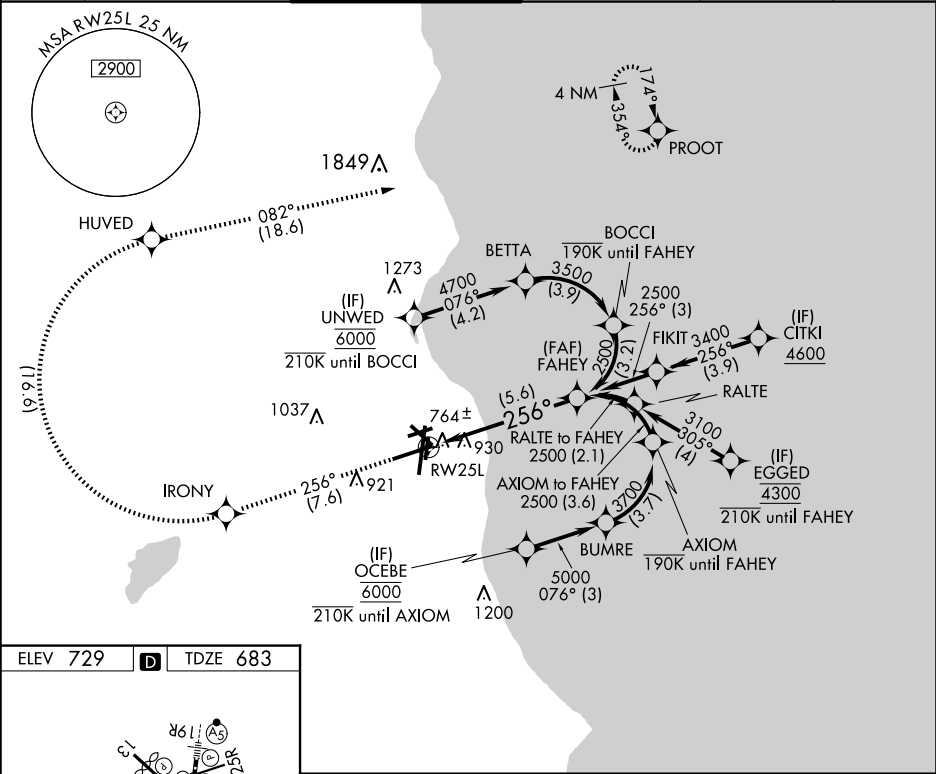

ELEV 729 D TDZE 683

TDZ/CL Rwy 1L
REIL Rws 1R, 7L,
13, 25R, 25L and 31
HIRL Rws 1L-19R and 7R-25L
MIRL Rws 1R-19L, 13-31 and 7L-25R

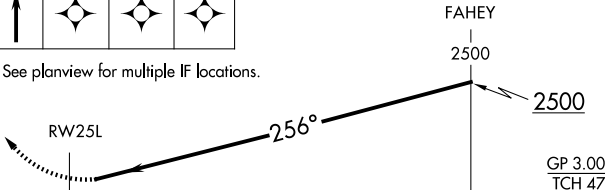3700	IRONY	HUVED	PROOT	
				
See planview for multiple IF locations.				
				
CATEGORY	A	B	C	D
RNP 0.10 DA		1087-1 ³ / ₈	404 (400-1 ³ / ₈)	
RNP 0.30 DA		1256-2	573 (600-2)	
AUTHORIZATION REQUIRED				