

WAAS  
CH **86824**  
**W27A**

APP CRS  
**270°**

Rwy Ldg  
TDZE **581**  
Apt Elev **590**

⚠


⚠

Circling to Rwy 5 NA at night. Baro-VNAV NA when using Davenport altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 40°C (104°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Davenport altimeter setting; increase LPV DA to 828 feet and LNAV/VNAV DA to 1233 feet and LNAV/VNAV visibility all Cats ½ SM; increase all MDA 60 feet and LNAV visibility Cats C and D ¼ SM. Circling visibility Cats C and D ¼ SM. For inoperative ALS, increase LNAV/VNAV visibility all Cats to 2 SM, LNAV visibility Cats C and D to 1 ½ SM. When using Davenport altimeter setting increase LNAV visibility Cats C and D to 1 ½ SM.  
\*\*RVR 1800 authorized with use of FD or AP or HUD to DA.

RNAV (GPS) RWY 27

QUAD CITIES INTL (MLI)

|                      |                                            |                                                  |                         |                           |                         |
|----------------------|--------------------------------------------|--------------------------------------------------|-------------------------|---------------------------|-------------------------|
| ATIS<br><b>121.2</b> | QUAD CITY APP CON ★<br><b>125.95 257.8</b> | QUAD CITY TOWER ★<br><b>119.4(CTAF) 0 269.55</b> | GND CON<br><b>121.9</b> | CLNC DEL<br><b>124.05</b> | UNICOM<br><b>122.95</b> |
|----------------------|--------------------------------------------|--------------------------------------------------|-------------------------|---------------------------|-------------------------|

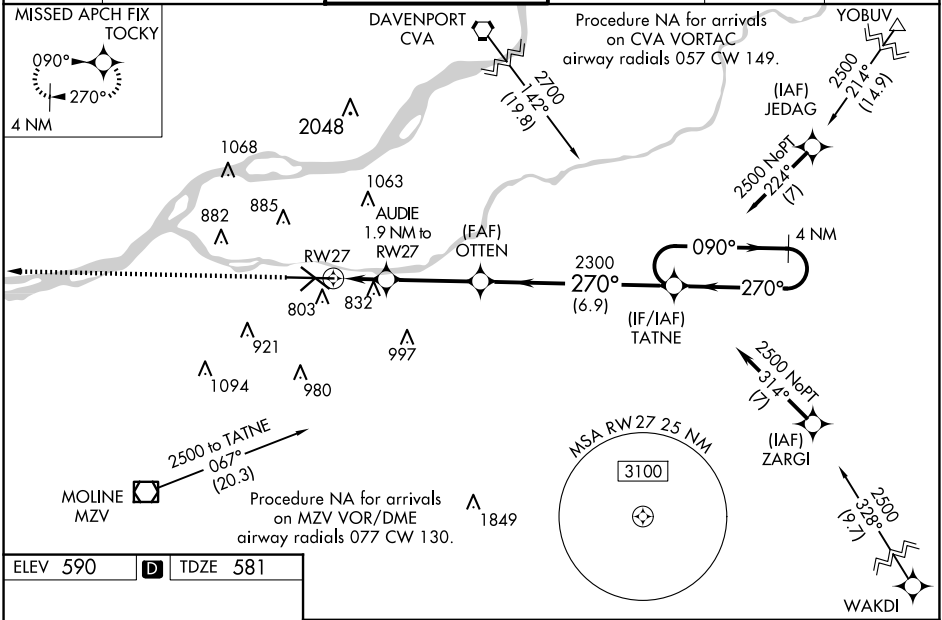

ELEV 590

D

TDZE 581

AS

AS

10002 X 150

351 X 150

31


27

TWR 684

MIRL Rwy 5-23

REIL Rws 13 and 31

HIRL Rws 9-27 and 13-31
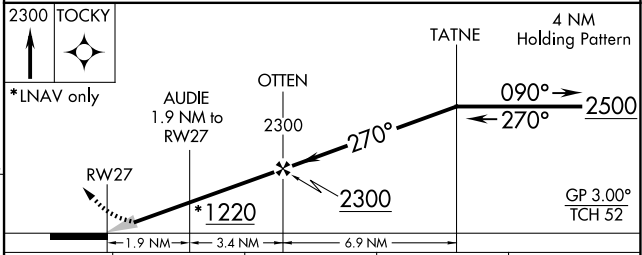
|                                                                                     |                                                                                     |                       |                       |                         |  |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------------|--|
| 2300                                                                                | TCKY                                                                                | 4 NM Holding Pattern  |                       |                         |  |
|  |  |                       |                       |                         |  |
| *LNAV only                                                                          |                                                                                     |                       |                       |                         |  |
|  |                                                                                     |                       |                       |                         |  |
| CATEGORY                                                                            | A                                                                                   | B                     | C                     | D                       |  |
| LPV DA**                                                                            | 781/24                                                                              |                       | 200 (200-½)           |                         |  |
| LNAV/VNAV DA                                                                        | 1186-1½                                                                             |                       | 605 (600-1½)          |                         |  |
| LNAV MDA                                                                            | 1100/24                                                                             | 519 (600-½)           | 1100/55               | 519 (600-1)             |  |
| CIRCLING                                                                            | 1140-1<br>550 (600-1)                                                               | 1200-1<br>610 (700-1) | 1320-2<br>730 (800-2) | 1420-2¾<br>830 (900-2¾) |  |