
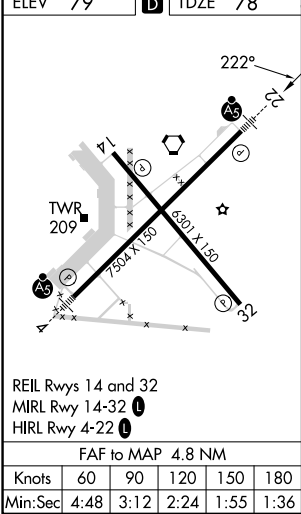


LOC I-MZR 109.5	APP CRS 222°	Rwy Idg TDZE 78 Apt Elev 79
---------------------------	------------------------	---

ILS or LOC RWY 22
MONROE RGNL (MLU)

DME or RADAR required for procedure entry.		MALSRL 	MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold, continue climb-in-hold to 3000.
 Circling Rwy 14 NA at night. For inop ALS, increase S-LOC 22 Cat C/D visibility to 1½ SM.  # DME from MLU VORTAC.			

ATIS 125.05	MONROE APP CON ★ 118.15 290.475	MONROE TOWER ★ 118.9 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.65	UNICOM 122.95
-----------------------	---	---	-------------------------	---------------------------	-------------------------

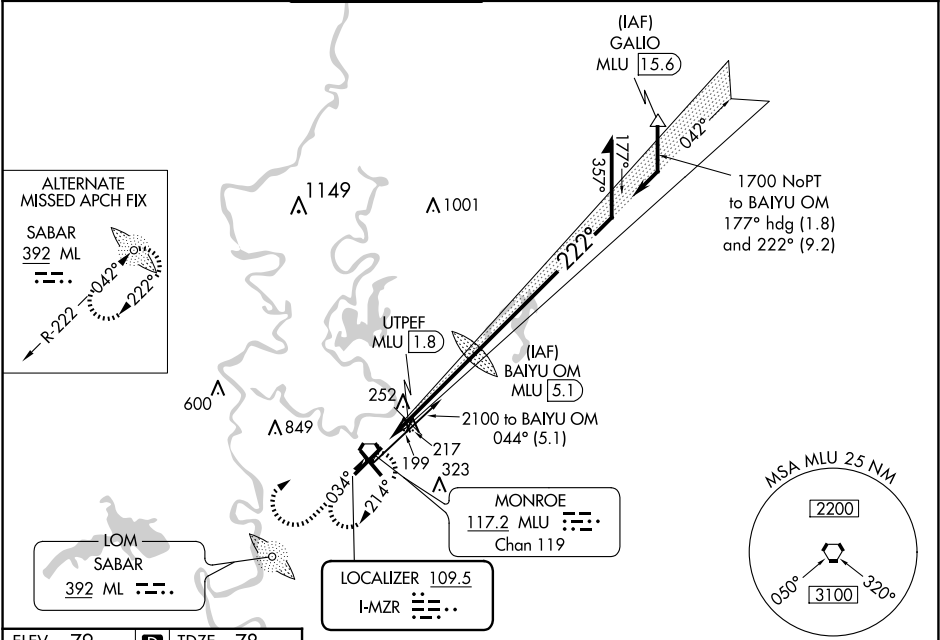

1800	3000	MLU	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 50).					
*LOC only.								
CATEGORY	A		B		C		D	
S-ILS 22	278-½ 200 (200-½)							
S-LOC 22	560-½		482 (500-½)		560-1		482 (500-1)	
CIRCLING	580-1		501 (600-1)		740-¾ 661 (700-¾)		1160-3 1081 (1100-3)	
# UTPEF FIX MINIMUMS								
S-LOC 22	500-½		422 (500-½)		500-¾		422 (500-¾)	
CIRCLING	580-1		501 (600-1)		740-¾ 661 (700-¾)		1160-3 1081 (1100-3)	

SC-4, 04 SEP 2025 to 02 OCT 2025

SC-4, 04 SEP 2025 to 02 OCT 2025