

WAAS CH 61135 W36A	APP CRS 004°	Rwy Idg 4000 TDZE 547 Apt Elev 551
--	------------------------	---

RNAV (GPS) RWY 36


NORTHWEST ALABAMA RGNL (MSL)

RNP APCH-GPS.

▼ Circling to Rwy 18 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Baro-VNAV and VDP NA when using Decatur altimeter setting. When local altimeter setting not received, use Decatur altimeter setting and increase LPV DA to 874, LNAV/VNAV DA to 1012 and all MDA 100 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase LNAV Cats C/D visibility ¼ mile, and Circling Cats C/D visibility ½ mile.

MISSED APPROACH:
Climb to 3000 direct TUBYO and hold.

ASOS 119.425	MEMPHIS CENTER 120.8 307.0	GCO 121.725	UNICOM 123.05 (CTAF) 0
------------------------	--------------------------------------	-----------------------	----------------------------------

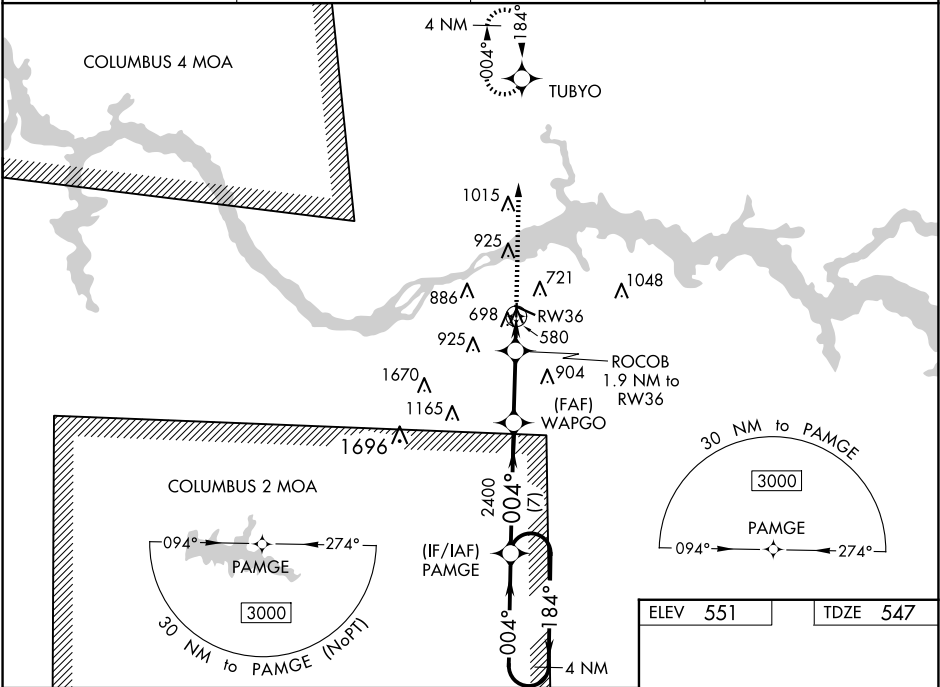

4 NM Holding Pattern		PAMGE		WAPGO		ROC OB 1.9 NM to RW36		3000 TUBYO *LNAV only.	
3000 ←184° 004°→		004°		2400		*1.2 NM to RW36		RW36	
GP 3.00° TCH 40		2400		*1160		0.7		1.2 NM	
7 NM		3.8 NM		0.7		1.2 NM			
CATEGORY		A		B		C		D	
LPV DA		797-1		250 (300-1)					
LNAV/ VNAV DA		935-1 ³ / ₈		388 (400-1 ³ / ₈)					
LNAV MDA		960-1 413 (500-1)		960-1 ¹ / ₈ 413 (500-1 ¹ / ₈)					
CIRCLING		1040-1 489 (500-1)		1280-2 729 (800-2)		1280-2 ¹ / ₄ 729 (800-2 ¹ / ₄)			

