
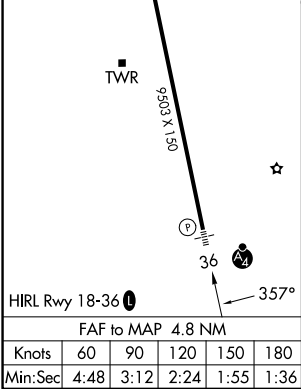



LOC I-BSQ	APP CRS	Rwy Ldg	9503
111.9	357°	TDZE	25
		Apt Elev	25

ILS or LOC RWY 36
MYRTLE BEACH INTL (MYR)

RADAR required.		MALSF	MISSED APPROACH: Climb to 3000 on heading 357° expect RADAR vectors to KOOKE INT/FAY 62.9 DME and hold.
For inop ALS increase S-LOC 36 Cats D/E visibility to RVR 5000.			

ATIS 123.925	MYRTLE BEACH APP CON ★ (171° - 321°) 127.4 257.95 (322° - 170°) 119.2 350.3	MYRTLE BEACH TOWER ★ 128.45 (CTAF) 0 259.3	GND CON 120.3 275.8	CLNC DEL 120.3	UNICOM 122.95
-----------------	---	---	------------------------	-------------------	------------------

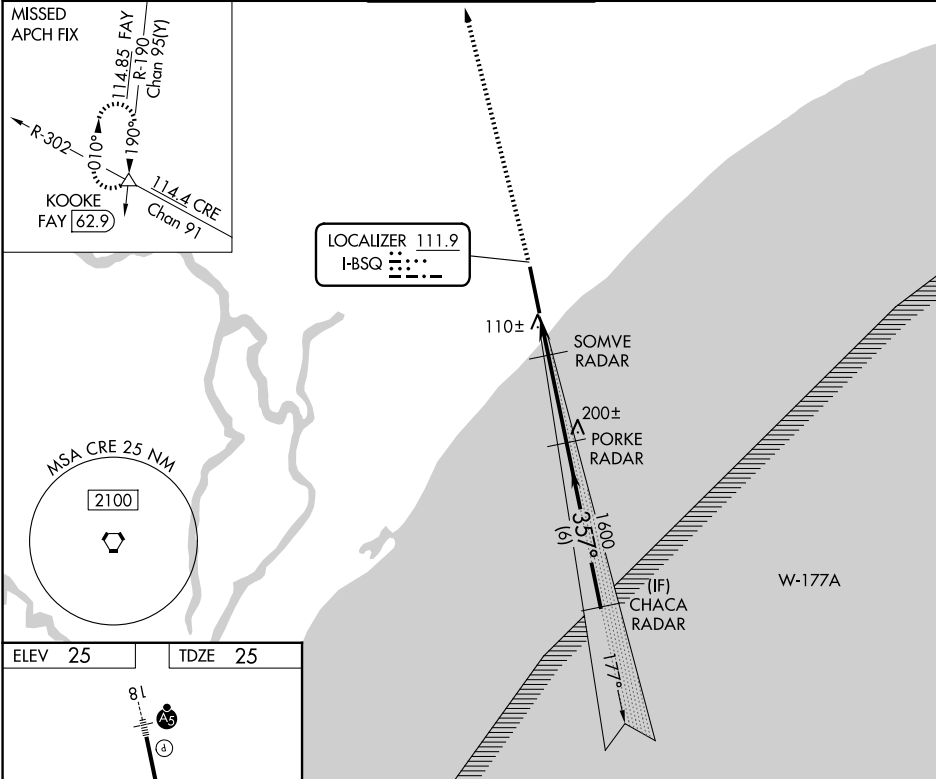

3000 ↑	hdg 357°	KOOKE △	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).				
			PORKE RADAR	CHACA RADAR			
							
CATEGORY			A	B	C	D	E
S-ILS 36			225/40 200 (200-¾)				
S-LOC 36			360/40 335 (400-¾)				
CIRCLING			560-1	535 (600-1)	700-2 675 (700-2)	700-2¼ 675 (700-2¼)	700-2½ 675 (700-2½)

SE-2, 04 SEP 2025 to 02 OCT 2025

SE-2, 04 SEP 2025 to 02 OCT 2025