

LOC I-POU
111.3

APP CRS
063°

Rwy Idg
TDZE **156**
Apt Elev **164**

ILS or LOC RWY 6
HUDSON VALLEY RGNL (POU)

DME required for LOC only.

▼

⚠

Circling NA to Rwys 7 and 25. Circling Rwy 15, 33 NA at night. Rwy 6 helicopter visibility reduction below ¾ SM NA. DME from IGN VOR/DME. Simultaneous reception of I-POU and IGN DME required. For inop ALS, increase S-LOC 6 Cats C/D visibility to 1 ½ SM. When local altimeter setting not received, use Montgomery altimeter setting: increase S-ILS 6 DA to 556; increase all MDA 80 feet and S-LOC 6 and Circling Cats C/D visibility ¼ SM. Inop table does not apply to S-ILS 6 all Cats and S-LOC 6 Cats A/B. For inop ALS when using Montgomery altimeter setting, increase S-ILS 6 all Cats visibility to 1 ½ SM and S-LOC 6 Cats C/D visibility to 1 ½ SM.


MALS R

⬆

A5

MISSED APPROACH:
Climb to 3000 direct IGN VOR/DME and hold, continue climb-in-hold to 3000.

ATIS 126.75	NEW YORK APP CON 132.75 363.1	DUTCHESS COUNTY TOWER ★ 124.0 (CTAF) 0 269.15	GND CON 121.8	CLNC DEL 121.8	UNICOM 122.95
-----------------------	---	---	-------------------------	--------------------------	-------------------------

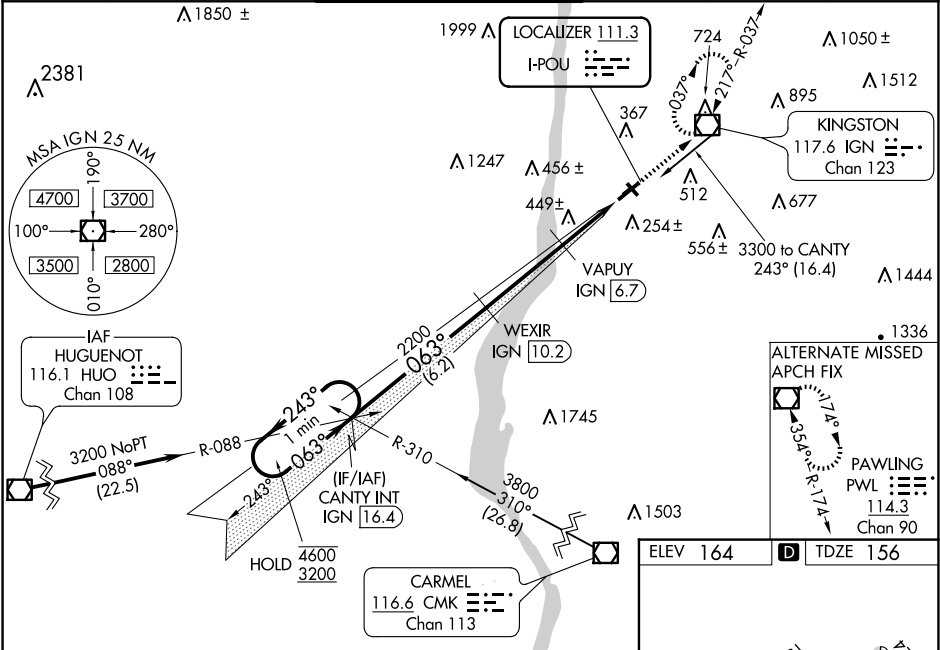

One Minute Holding Pattern

CANTY INT
IGN 16.4

4600 ← 243°
3200 → 063°

GS 3.00°
TCH 58

WEXIR
IGN 10.2

VAPUY
IGN 6.7

3000 ↑ IGN

*LOC only.

*1040

6.2 NM 3.5 NM 1.2 1.4 NM

CATEGORY	A	B	C	D
S-ILS 6		485-1	329 (400-1)	
S-LOC 6		640-1	484 (500-1)	
CIRCLING	760-1 596 (600-1)	840-1 676 (700-1)	940-2¼ 776 (800-2¼)	1080-3 916 (1000-3)

MIRL Rwy 15-33
HIRL Rwy 6-24
REIL Rwy 24
REIL Rwy 33