


WAAS CH 86913 W36A	APP CRS 357°	Rwy Idg 5135 TDZE 8 Apt Elev 8
--	------------------------	---

RNAV (GPS) RWY 36L
LAKEFRONT (NEW)

A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting: increase LPV DA to 369 feet, LNAV/VNAV DA to 460 feet and all visibilities ½ mile; increase all MDA 40 feet and Circling Cat D visibility ¼ mile. VDP and Baro-VNAV NA when using Louis Armstrong New Orleans Intl altimeter setting.

MISSED APPROACH: Climb to 2100 direct PNDAR and via track 064° to SNAKI and hold.

ATIS 124.9	NEW ORLEANS APP CON NORTH 133.15 290.3 SOUTH 123.85 256.9	LAKEFRONT TOWER ★ 118.95 (CTAF) 0	GND CON 121.7 335.575	CLNC DEL 127.4
----------------------	---	--	---------------------------------	--------------------------

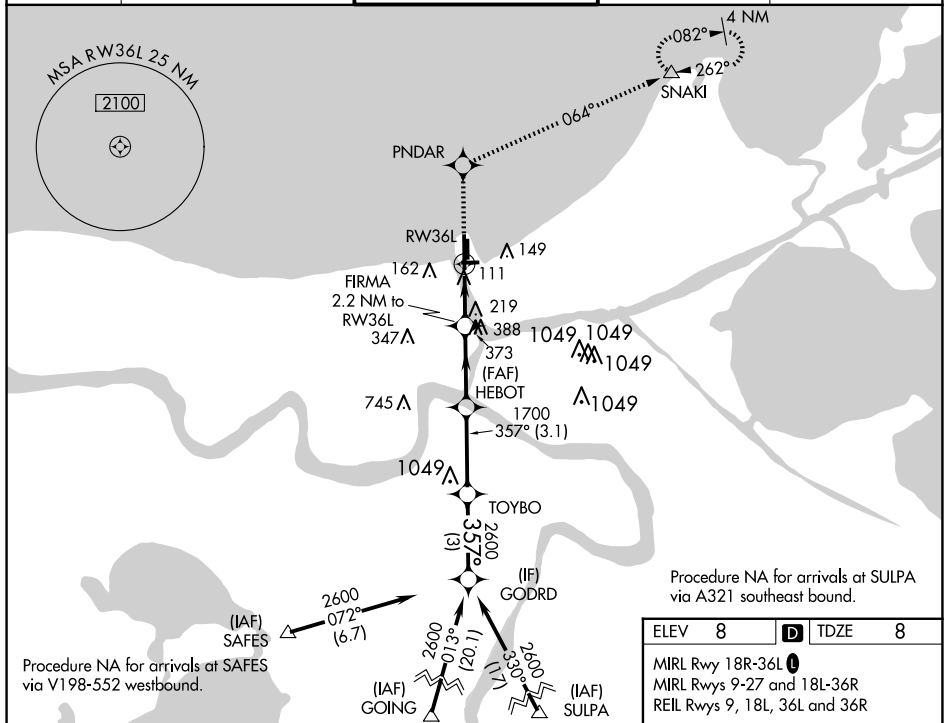

2100 ↑	PNDAR ✱	tr 064° △	SNAKI				
*LNAV only.							
1.7 NM to RW36L 0.5 NM to FIRMA 2.2 NM to RW36L 2.9 NM to HEBOT 3.1 NM to TOYBO 3 NM to GODRD							
CATEGORY				D			
LPV DA		340-1 $\frac{1}{8}$ 332 (400-1 $\frac{1}{8}$)					
LNAV/VNAV DA		431-1 $\frac{3}{8}$ 423 (500-1 $\frac{3}{8}$)					
LNAV MDA		600-1 592 (600-1)			600-1 $\frac{3}{4}$ 592 (600-1 $\frac{3}{4}$)		
CIRCLING		600-1 592 (600-1)			700-2 692 (700-2)		820-2 $\frac{3}{4}$ 812 (900-2 $\frac{3}{4}$)

